

ACE-4530AP 300W 2U ATX Power Supply



**Coming
Soon**

PFC



Back View

Best Solution for RACK-1350G !!
ATX 2.0 standard w/ new 20+4 ATX power and SATA connector design !!

Feature

1. Active PFC (full range), MEET IEC-1000-3-2 CLASS D
2. 12V Max. Current : 16A
3. TEMPERATURE RANGE: OPERATING 0°C ~ 50°C
4. HUMIDITY: OPERATING: 20%-95%,
NON-OPERATING: 10%-95%
5. Remote on/off control
6. Cooling: TWO 60 mm DC Fans
7. 3.3V /5V Remote sensing


Specification

Input Voltage	90 ~ 264VAC Full Range		
Input Frequency	47 ~ 63Hz		
Input Current	6A (RMS) for 115VAC		
	3A (RMS) for 230VAC		
Inrush Current	60A MAX. for 115VAC		
	80A MAX. for 230VAC		
Output Voltage	Current	Ripple & Noise	
	+3.3V	20A(1A min)	70mV
	+5V	35A(3A min)	80mV
	+12V	16A(2A min)	120mV
	-5V	0.5A(0.05A min)	120mV
	-12V	1A(0.05A min)	150mV
Over Voltage Protection	+3.3V	4V ~ 5.5V	
	+5V	5.5V ~ 7V	
Short Circuit Protection	+5V, -5V, +12V, -12V, +3.3V		
Hold Up Time	16ms min.		
Operating Temperature	0°C ~ 50°C		
Efficiency	63%		
Dimension	200(D) x 100(W) x 70(H) mm		

Safety



Dimension

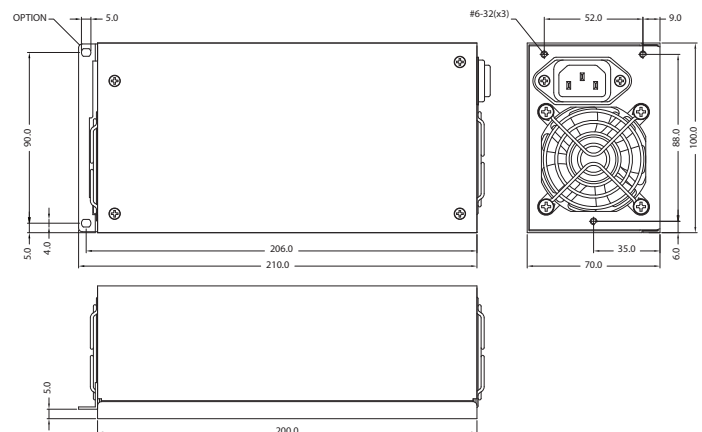

Ordering Information

Part No.	Description
ACE-4530AP-RS	300 2U AC-DC ATX Power Supply, with PFC