

# IPMR-3006

**Industrial Multifunction VPN Router w/up to 2 LTE 4G + 2 serial ports + 6 Gigabit Ethernet Switch(incl. 4 PoE) w/ Load Balancing\*\*, VPN, Protocol Gateway, Storage\*\*; 24V input**

- Up to 2 concurrent mobility for 3G/4G LTE Link&GPS(2L model/4 SIMs)
- Built-in 6 Gigabit Ethernet switch including 4 PoE at/af w/budget 80W
- VPN router for Multi-site VPN, OpenVPN, L2TP, IPSec, PPTP\*\*
- Load Balancing\*\* support 8 mechanism
- Support NAT and Firewall
- Support Modbus or DNP3\*\* gateway on serial ports
- Support 2 RS422/485 ports with 2.5KV isolation or 2x RS232 ports
- Optional storage microSD\*\* for storage backup or multi-media content suit with load-balancing route.
- Input voltage selection 9~56VDC (24V model)
- Environmental monitoring for router inside info with voltage, current, temperature and total PoE load; LTE graphic signal strength & TX/RX rate display
- Editable login page of captive portal for hot-spot application
- USB port to backup, restore the configuration file and upgrade firmware\*; Dual image firmware\*



## OVERVIEW

Lantech IPMR-3006 series is a next generation industrial multi-function VPN router w/up to 2x LTE modem + + 6x Gigabit Ethernet switch incl. 4 PoE ports + 2 serial ports that supports advanced function of VPN, Load-balancing\*\*(Basic & Full package), Protocol gateway(Modbus,DNP3\*\*), Storage\*\* and LTE quad SIM fail-over for industrial applications. The dual core CPU with 1.6GHz + 256M flash enables the router to multi-task smoothly.

### Dual concurrent LTE design 4G/3G for load-balancing

With dual LTE module design (2L model), 4 SIM card slots, TMR-5002 can allow auto-swap, failover & failback between multiple service providers for real non-stop connection. With concurrent LTE modules, it can also allocate bandwidth by "Load Balancing\*\* with 8 schemes between multiple WANs.

With one mobile LTE module (1L model), 2 SIM card slots, IPMR-3006 provides redundant link between two service providers.

Both GPS and Russian GLONASS systems are supported.

### Load Balancing\*\* with 8 mechanisms for multi-WANs (premium license)

IPMR-3006 supports Load Balancing\*\* for LTE/WAN connections. There are eight schemes for Load Balancing\*\* function:

Pack	Algorithm	Description
Standard	Fixed	Manually route by traffic type through fixed WAN link.
Basic Package	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not fallback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. WiFi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.
Full Package (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security

		services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
	Fastest*	Routes connections through the WAN link with lowest latency time.

**2 port serial connection, Modbus / DNP3\*\* gateway**

It builds in 2 port serial connection for RS232, RS422, 485 in which RS422/485 has 2.5KV isolation protection.

The built-in Modbus gateway can convert Modbus RTU/ASCII to Modbus TCP for device control.

It also can support optional DNP3\*\* gateway over serial ports

**VPN and firewall**

Besides traditional VPN peer to peer tunneling, IPMR-3006 support latest Multi-Site VPN function that is an efficient way for mesh tunneling. The registration is under cloud service and encrypted by SSH makes the connection easy and safe.

It supports Multi-Site VPN, Open VPN, L2TP, IPsec and PPTP\*\* for various VPN applications.

The built-in Layer-4 firewall includes DoS\*\*, IP address filter / Mac address filter\* / TCP/UDP port number.

**DIDO for alarm & email\*\* notice; Event log; Remote Web/SMS\*\* control**

2 sets of DIDO function can support additional high/low physical contact for designate applications besides Port / Power events, for example, DIDO function can trigger alarm if the router was moved or stolen. In case of events, the IPMR-3006 will immediately send email\*\* and trap.

When the router is at remote area with limited access, Web/SMS\*\* control can help to get router status or remotely reboot by Web/SMS\*\*.

**Wide range input voltage from 9V-56VDC; Built-in 6 port PoE at/af switch with 80W budget**

The IPMR-3006 is able to work from 9VDC to 56VDC for PoE at/af with PoE budget 80W @12V /80W @24V&48V that is particular good for vehicle, rail train, depot etc. application.

**Environmental monitoring for inside router info& alerting; Graphic LTE signal strength and TX/RX rate display**

The built-in environmental monitoring can detect router ambient temperature, voltage, current and total PoE load where can send the syslog, email\*\* and SMS\*\* alert when abnormal.

**Cloud/Host based InstaView\*\*/InstaAir\*\* software for router / fleet management and monitoring**

Lantech InstaView\*\* can offer fixed location router central management, configuration, and monitoring via secured Cloud or Host server. InstaAir\*\* can offer fleet router management including the GPS tracking, remote configuration/upgrade, monitoring/alerting and report function

**USB port for back up, restore configuration and upgrade firmware\*; Dual image firmware\***

The built-in USB port can upload/download the configuration through USB dongle for router replacement

It supports dual-image firmware\* to choose which one to start.

**Optional USB to microSD\*\* for storage backup or multimedia resources**

The optional internal USB to microSD\*\* can have data backup or pre-store the multimedia resources for content application. User can designate the route via load-balancing\*\* scheme to upload/download the data per request.

**Ruggedized industrial design and FCC\*,CE\*& E-marking\*\* certificate**

The IPMR-3006 is designed to meet with industrial network environment with IP 30 housing. It passed serious tests under extensive Industrial EMI and environmental vibration and shocks standards.

With CE & FCC radio certification for LTE and E-marking certificate, the IPMR-3006 is best for outdoor community, vehicle, process control automation etc. For more usage flexibilities, IPMR-3006 supports wide operating temperature from -20°C to 75°C & -40°C to 75°C(-E model)


**FEATURES & BENEFITS**

- Built-in 6 Gigabit Ethernet switch incl. 4 PoE at/af for PoE budget 80W
- 6 SMA type connectors for LTE & GPS
- HTTP/HTTPS/Telnet/SSH & Administration access
- Support IPv6\*\* & IPv4 protocol
- Radius Authentication, EAP-MD5, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported\*\*
- Support Multi-Site VPN for mesh tunneling as well as Open VPN, L2TP, IPsec and PPTP\*\* fro secured network connection
- The built-in Layer-4 firewall includes DoS\*\*, IP address filter / Mac address filter\* / TCP/UDP port number.
- Support SNMP\*v1/v2c/v3
- NAT/DMZ
- Dual concurrent LTE 4G/3G design (2L model)for auto-swap/failover/failback between multiple ISPs for continuous service (four SIM card slots)
- One LTE 4G/3G w/ 2 SIM card design(1L model) for mobile redundancy
- GPS/ GLONASS (support by LTE module) connection
- Fast roaming\*\* (Optional ) <50ms between APs by Wireless Controller
- Load Balancing\*\* supports 8 mechanism between multiple WANs

Pack	Algorithm	Description
Standard	Fixed	Manually route by traffic type through fixed WAN link.
Basic Package	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not fallback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. WiFi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.
Full Package (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
	Fastest*	Routes connections through the WAN link with lowest latency time.

- Built-in 2 x serial ports(RS232/RS422/485)
- Serial port with 2.5KV isolation on RS422/485
- Supports 2DI / 2DO (Digital Input / Output)
- Built-in Modbus gateway converting Modbus RTU/ASCII to Modbus/TCP for serial ports
- Optional DNP3 gateway with serial ports
- Event alerting by Syslog, SNMP Trap, Email\*\*, SMS\*\* text, Relay ; Permanent local log rotation / Maxi 1K records
- Remote Web/SMS\*\* control to get status or re-boot by Web or SMS\*\*
- Graphic LTE signal strength & TX/RX rate display
- Support SNTP to synchronize system clock
- Support LLDP discovery protocol
- Support DHCP Server and Client
- Built-in environmental monitoring for system input voltage, current and ambient temperature; Able to set alert when abnormal
- Dual image firmware\* to choose which to start
- Firmware upgradeable through TFTP/FTP/HTTP
- Configuration backup and restoration
  - Supports text configuration file for system quick installation
  - USB port to upload/download configuration by USB dongle
  - InstaView\*\*/InstaAir\*\* for centralized configuration deployment, backup & upgrade
- Reset button for factory default mode
- Optional built-in USB to microSD\*\* for storage backup or multimedia resource
- IP 30 housing for industrial environment
- Cloud/Host based InstaView/AIR\*\* for fixed/fleet router management/configuration/monitoring
- DIN-Rail and Wall-mount\*\* installation
- Operation temperature -20~75°C or -40~75°C(-E model)

**DIMENSIONS (unit=mm)**

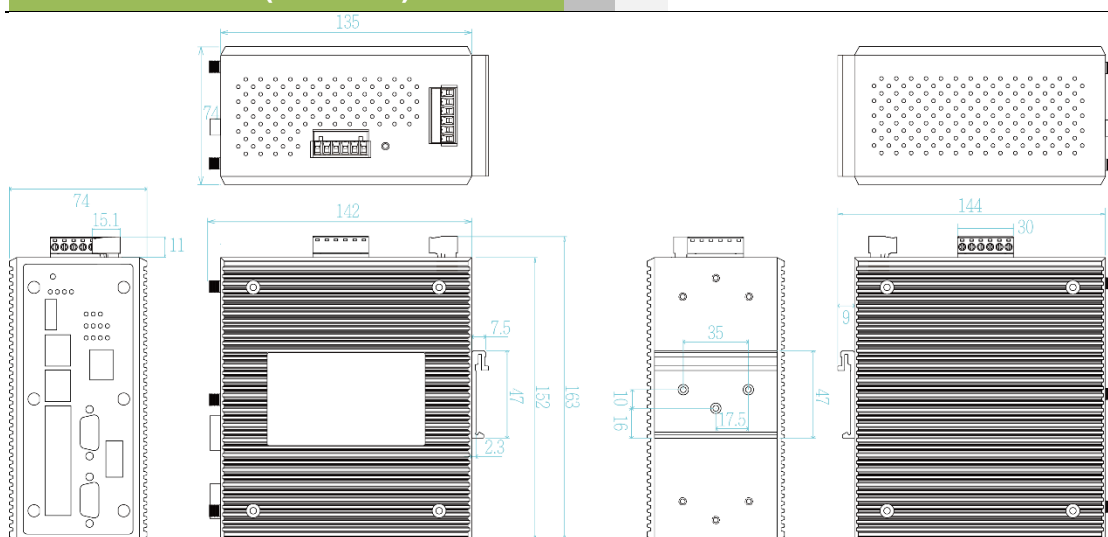

**SPECIFICATION**

Location Solutions	GPS, Glonass (EUNA/Americas) GPS, Glonass, Beidou, Galileo (APAC model only)	Priority	Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs.
Band Options	<b>APAC &amp; Australia (APAC model)</b> LTE: 2100/1800/850/2600/900/850/850/1500/700/2600/1900/2300/2500 MHz (B1/B3/B5/B7/B8/B18/B19/B21/B28/B38/B39/B40/B41)  <b>EU &amp; USA model</b> LTE: 2100/1800/2600/900/800 MHz (B1/B2/B3/B4/B5/B7/B12/B13/B20/B25/B26/B29/B30/B41)  <b>WorldWide (WW model)</b> LTE: 2100/1900/1800/1700/850/2600/900/1800/700/700/850/850/800/850/700/2300/1500/2500/3500/3700/5200/3600/1700 (B1/B2/B3/B4/B5/B7/B8/B9/B12/B13/B18/B19/B20/B26/B28/B29/B30/B32/B41/B42/B43/B46/B48/B66)	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights
		Custom Route	Routing through the selected WAN for each specific traffic ex: TCP/UDP port number and IP address.
		<b>Full Package incl. Basic package**</b>	
		Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link, that is suitable for security services like online payment etc.
Data Rates – LTE	<b>APAC &amp; Australia (APAC model)</b> <b>Downlink (Cat 6):</b> FDD: 300 Mbps TDD: 222 Mbps <b>Uplink (Cat 6):</b> FDD: 50 Mbps TDD: 26 Mbps  <b>Americas (US model) / EMEA (EU model)</b> <b>Downlink (Category 3):</b> 100 Mbps (20 MHz bandwidth) 50 Mbps (10 MHz bandwidth) <b>Uplink (Category 3):</b> 50 Mbps (20 MHz bandwidth) 25 Mbps (10 MHz bandwidth)	Smallest load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link).  The traffic load could be defined by downstream, upstream or total traffic
		Fastest*	Routes connections through the WAN link with lowest latency time.
		Security	SSH/SSL/HTTPS
<b>Software</b>		Login Security	Supports IEEE802.1x** Authentication/RADIUS
IPv6/4	Present	Access Security	HTTP/HTTPS/Telnet/SSH & Administration; SNMP*v1/v2/v3 access for authentication via MD5/SHA(v3) and Encryption via DES/AES(v3)
VPN	Multi-site VPN, Open VPN, PPTP**, L2TP, IPSec	Protocol	PPPoE Client, DHCP server/client, Adjustable MTU, Port forwarding (NAPT), DMZ; NAT, SNTP, Firewall(Firewall(DoS**, IP address filter / Mac address filter* / TCP/UDP port name), VRRP**, DDNS*
Firewall	DoS**, IP address filter / Mac address filter* / TCP/UDP port number	Protocol Gateway	Modbus / DNP3** on serial ports
Load Balancing**	8 schemes for multiple WAN(client mode)	Management	SNMP*v1, v2c, v3/ Web/Telnet/CLI
Fixed(standard)	Manually route by traffic type through fixed WAN link.	Environmental Monitoring	System status for input voltage, current, ambient temperature to be shown in GUI and sent alerting if any abnormal status
<b>Basic Package**</b>		Graphic signal display	Graphic LTE signal strength & TX/RX rate display
Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link failure occurs.	Timer	Built-in Real Time Clock to keep track of time always(RTC)
		Discovery	IEEE 802.1ab Link Layer Discovery Protocol (LLDP)
<b>Basic Package**</b>		SNMP trap	Device cold / warm start Port link up / link down DI/DO high / low
<b>Basic Package**</b>		Remote Web/SMS** control	To reboot router by WebUI or SMS**
<b>Basic Package**</b>		Maintenance	Firmware upgradeable through TFTP/FTP/HTTP
<b>Basic Package**</b>		Configuration	Supports text configuration file for system quick

backup & restore	installation USB port to upload/download configuration by USB dongle InstaView**/InstaAir** for mass configuration/upgrade	(X) port indicator	
<b>Physical Ports &amp; System</b> Connectors 10/100/1000T: 6x ports RJ 45 (incl 4 PoE ports) USB x 1 RS-232 connector: 1 x RJ 45 Serial connector : 2 DB9 SIM card slots : 4(2L) or 2(1L) SMA connector : 6 Power & P-Fail connector: 1 x 6-pole terminal block DIDO : 1 x 5-pole terminal block Serial Baud Rate 1000Kbps for RS232 ; 12Mbps for RS422/485 Serial Data Bits 5, 6, 7, 8 Serial Parity odd, even, none, mark, space Serial Stop Bits 1, 1.5, 2 RS-232 TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND RS-422 Tx+,Tx-, Rx+, Rx-,GND RS-485 (2-wire) Data+, Data-,GND Isolation protection RS422/485 2.5KV isolation; 8KV contact & 15KV air RS232 8KV contact and 15KV air ESD DIDO 3KV isolation Input power 1.5KVA isolation Micro SD 128G or 256G(MSD model) DI/DO 2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA <b>LED Indicators</b> Power & System indicator Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red) , Ring Master(Green), Storage(Green), Serial1/Serial2(Green) 10/100/1000Base-T Link/Activity (Green), Speed (Yellow), PoE (Green)		SIM	Green for Link/Act
		GPS	Green for Link/Act
		Fault	Red: Ethernet link down or power down
		<b>Fault contact</b>	
		Relay	Relay output to carry capacity of 1A at 24VDC
		<b>Power</b>	
		Input power	Single DC input, 9~56VDC (24V model)
		PoE Budget	80W @ 12V /80W @24V&48V
		Power consumption (Typ.)	30.5 Watts
		<b>Physical Characteristic</b>	
Enclosure	IP 30 aluminum case		
Dimension	74 (W) x 142 (D) x 152 (H) mm		
Weight	1000g		
<b>Environmental</b>			
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)		
Operating Temperature	-20°C ~ 75°C (-4°F ~ 167°F) -40°C ~ 75°C (-40°F ~ 167°F) for E model		
Operating Humidity	5% to 95% Non-condensing		
<b>Regulatory approvals</b>			
EMC	FCC* Part 15 Class A, EN55032*		
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11		
E-marking**	E13**		
MTBF	NA		
Warranty	5 years		

\*Future Release

\*\*Optional

## ORDERING INFORMATION

For -40~75 operational temperature model, the model name will add -E

- **IPMR-3006-2L-2S-24V-EUNA.....P/N: 8624-011**  
Industrial Dual LTE (Quad SIM) Load Balancing\*\* VPN Mobile Router w/ 2 RS232 serial ports and 6 Giga Port Switch incl.4 PoE; EU and US band; single 9~56VDC; -20~75C
- **IPMR-3006-2L-2S-24V-APAC.....P/N: 8624-012**  
Industrial Dual LTE (Quad SIM) Load Balancing\*\* VPN Mobile Router w/ 2 RS232 serial ports and 6 Giga Port Switch incl.4 PoE; APAC band; single 9~56VDC; -20~75C
- **IPMR-3006-2L-2S-24V-WW.....P/N: 8624-013**  
Industrial Dual LTE (Quad SIM) Load Balancing\*\* VPN Mobile Router w/ 2 RS232 serial ports and 6 Giga Port Switch incl.4 PoE; worldwide band; single 9~56VDC; -20~75C
- **IPMR-3006-2L-2SA-24V-EUNA.....P/N:8624-0111**  
Industrial Dual LTE (Quad SIM) Load Balancing\*\* VPN Mobile Router w/2 RS422/485 serial isolated ports and 6 Giga Port Switch incl.4 PoE; EU and US band; dual 9~56VDC; -20~75C
- **IPMR-3006-2L-2SA-24V-APAC.....P/N:8624-0132**  
Industrial Dual LTE (Quad SIM) Load Balancing\*\* VPN Mobile Router w/2 RS422/485 serial isolated ports and 6 Giga Port Switch incl.4 PoE; APAC band; dual 9~56VDC; -20~75C
- **IPMR-3006-2L-2SA-24V-WW.....P/N:8624-0143**  
Industrial Dual LTE (Quad SIM) Load Balancing\*\* VPN Mobile Router w/2 RS422/485 serial isolated ports and 6 Giga Port Switch incl.4 PoE; Worldwide band; dual 9~56VDC; -20~75C
- **IPMR-3006-1L-2S-24V-EUNA.....P/N: 8624-021**  
Industrial One LTE (Dual SIM) Load Balancing\*\* VPN Mobile Router w/2 RS232 serial ports and 6 Giga Port Switch incl.4 PoE; EU and US band; single 9~56VDC; -20~75C
- **IPMR-3006-1L-2S-24V-APAC.....P/N: 8624-022**  
Industrial One LTE (Dual SIM) Load Balancing\*\* VPN Mobile Router w/2 RS232 serial ports and 6 Giga Port Switch incl.4 PoE; APAC band; single 9~56VDC; -20~75C
- **IPMR-3006-1L-2S-24V-WW.....P/N: 8624-023**  
Industrial One LTE (Dual SIM) Load Balancing\*\* VPN Mobile Router w/2 RS232 serial ports and 6 Giga Port Switch incl.4 PoE; Worldwide band; single 9~56VDC; -20~75C
- **IPMR-3006-1L-2SA-24V-EUNA.....P/N:8624-0211**  
Industrial One LTE (Dual SIM) Load Balancing\*\* VPN Mobile Router w/2 RS422/485 serial isolated ports and 6 Giga Port Switch incl.4 PoE; EU and US band; dual 9~56VDC; -20~75C
- **IPMR-3006-1L-2SA-24V-APAC.....P/N:8624-0221**  
Industrial One LTE (Dual SIM) Load Balancing\*\* VPN Mobile Router w/2 RS422/485 serial isolated ports and 6 Giga Port Switch incl.4 PoE; APAC band; dual 9~56VDC; -20~75C

- **IPMR-3006-1L-2SA-24V-WW.....P/N:8624-0231**  
Industrial One LTE (Dual SIM) Load Balancing\*\* VPN Mobile Router w/2 RS422/485 serial isolated ports and 6 Giga Port Switch incl.4 PoE; Worldwide band; dual 9~56VDC; -20~75C

**Built-in Micro SD series**

- **Built-in USB to MicroSD 128GB Module.....P/N:8850-210**
- **Built-in USB to MicroSD 256GB Module.....P/N:8850-213**

**Software License**

- **LOAD BALANCING Basic Package.....P/N: 9000-101**
- **LOAD BALANCING Full Package.....P/N: 9000-102**
- **DNP3 GATEWAY.....P/N: 9000-106**

**OPTIONAL ACCESSORIES**

**LTE Antenna**

- **ANT11000041** 791-960/1710~2170/2500~2700MHZ, SMA plug, EUNA
- **ANT11000042** 704-960/1710~2170MHZ, SMA plug, US

**Lantech Communications Global Inc.**

www.lantechcom.tw  
info@lantechcom.tw

© 2018 Copyright Lantech Communications Global Inc. all rights reserved.  
The revise authority rights of product specifications belong to Lantech Communications Global, Inc.  
Lantech may make changes to specification and product descriptions at any time without notice.