

IWAP-3002

Industrial Multifunction VPN Router w/up to 2x WiFi 11ac + 2/4 serial ports + 2 Gigabit Ethernet (incl.1 PD) w/Load Balancing**, TWCC**, VPN, Protocol Gateway, Storage**; 24V input

- Up to 2 concurrent WI-Fi 11ac and redundancy(1L-2AC model)
- Optional TWCC**(Train Wireless Carriage Coupling) for auto wireless coupling
- Built-in 2 Gigabit Ethernet ports incl. 1 PD port (1LAN+1WAN or 2LAN)
- Dual radio for 802.11ac/a/b/g/n with concurrent 5GHz & 2.4GHz bands up to 2.6GMbps Wi-Fi bandwidth(2AC model)
- MIMO technology 3T3R; SMA type up to 6 external antenna
- Unlimited concurrent WI-Fi users
- Fast roaming<50ms**, 802.11r standard
- Supports AP/Bridge /Client modes
- Air teaming** for Wi-Fi high-sustainability and aggregated bandwidth
- VPN router for Multi-site VPN, OpenVPN, L2TP, IPsec, PPTP**
- Load Balancing** support 8 mechanism
- Support NAT and Firewall
- Support Modbus / DNP3** gateway
- Support 2/4 RS422/485 ports with 2.5KV isolation or 2/4x RS232 ports
- Wide input range from 9V to 60VDC for vehicle, station and process automation applications
- Wi-Fi graphic signal strength & TX/RX rate display
- Optional storage micro SD** for storage backup or multi-media content suit with load-balancing
- Editable login page of captive portal for hot-spot application
- USB port to backup, restore the configuration file and upgrade firmware; Dual image firmware*



OVERVIEW

Lantech IWAP-3002 series is a next generation industrial multi-function VPN router w/up to 2x 802.3ac Wi-Fi + 2x Gigabit Ethernet(1 PD) + 2 or 4 serial ports that supports advanced function of VPN, Load-balancing**(Basic & Full Package), TWCC**, Protocol gateway(Modbus,DNP3**), Storage**, and Wi-Fi roaming**.The dual core CPU with 1.6GHz + 256M flash enables the router to multi-task smoothly.

Optional TWCC** (Train Wireless Carriage Coupling) for auto coupling

IWAP-3002 series supports optional TWCC** (Train Wireless Carriage Coupling) that enables auto wireless coupling to reconnect APs.

IEEE 802.11ac dual band radio up to 2.6GMbps bandwidth

With IEEE 802.11ac capability, IWAP-3002 can operate either 5GHz or 2.4GHz bands, offering the maximum speed of 2.6GMbps bandwidth 1.3GMbps per 802.11ac module). It is also compatible with 802.11b/g/n that can work with 2.4GHz for longer range transmission.

The Wi-Fi 11ac supports AP/BRIDGE/AP Client modes can be

diverse for most of wireless application. Working with load-balancing** "Priority" mode, the AP client can enable router to transmit on Wi-Fi with first priority.

Air teaming** for wireless high-sustainability and aggregated bandwidth

The innovative Air-teaming protection can combines multiple wireless links to achieve both high-sustainability and aggregated bandwidth. High sustainability can keep the network traffic alive even one link is down or severely interfered. Aggregated bandwidth can bind two link channels to provide the maximum throughput.

MIMO technology with 3T3R and SMA type connectors

Lantech IWAP-3002 series adapts MIMO technology with smart antenna transmission and reception for 3T3R. With six external detachable Omni connectors and optional antennas, IWAP-3002 can have better Wi-Fi coverage. It can support unlimited concurrent WI-Fi users.

Optional 802.11r fast roaming < 50ms**

IWAP-3002 support fast roaming < 50ms** (optional) in

coordination with Lantech Wireless Controller to allow encryption keys to be stored on all of the APs in a network. Client mode supports PMK** Caching and pre-authentication (move to roaming section).

Wireless WMM QoS

IWAP-3002 supports 802.11e standard which defines a set of Quality of Service for wireless LAN applications as well as WMM (Wi-Fi multimedia)

Advanced security & 16 SSIDs

The security support standards including 64/128bits WEP, WPA/WPA2 PSK (TKIP*, AES), 802.1x** ensures the best security and active defense against security threats. Lantech IWAP-3002 support up to 16 SSIDs, each SSID has its independent security and encryption.

Load Balancing with 8 mechanism for multi-WANs (premium license pack)**

IWAP-3002 supports Load Balancing** for WAN (client mode) connections. There are eight schemes for Load Balancing** function:

Pack	Algorithm	Description
Standard	Fixed	Manually route by traffic type through fixed WAN link.
Basic Package	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not failback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. Wi-Fi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.
Full Package (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link, that is suitable for security services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
	Fastest*	Routes connections through the WAN link with lowest latency time.

2 or 4 port serial connection, Modbus / DNP3 gateway**
It builds in 2 or 4 port serial connection for RS232, RS422, 485

in which RS422/485 has 2.5KV isolation protection.

The built-in Modbus gateway can convert Modbus RTU/ASCII to Modbus TCP for device control.

It also can support optional DNP3** gateway over serial ports

VPN and firewall

Besides traditional VPN peer to peer tunneling, IWAP-3002 support latest Multi-Site VPN function that is an efficient way for mesh tunneling. The registration is under cloud service and encrypted by SSH makes the connection easy and safe.

It supports Multi-Site VPN, Open VPN, L2TP, IPsec and PPTP** for various VPN applications.

The built-in Layer-4 firewall includes DoS**, IP address filter / Mac address filter* / TCP/UDP port number

DIDO for alarm & email notice; Event log; Remote Web control**

2 sets of optional DIDO function can support additional high/low physical contact for designate applications besides Port / Power events, for example, DIDO function can trigger alarm if the router was moved or stolen. In case of events, the IWAP-3002 will immediately send email** and trap.

When the router is at remote area with limited access, Web control can help to get router status or remotely reboot.

Wide range input voltage from 9V-60VDC; Built-in 2 port Gigabit Ethernet incl. 1PD port

The IWAP-3002 is able to work from 9VDC to 60VDC that is particular good for vehicle, rail train, depot etc. application.

Two port Gigabit Ethernet including 1 PD port can be supported as 1LAN+1WAN or 2LAN models.

Graphic Wi-Fi signal strength and TX/RX rate display

The graphic Wi-Fi signal strength and TX/RX rate display shows connection status at a glance

USB port for back up, restore configuration and upgrade firmware; Dual image firmware*

The built-in USB port can upload/download the configuration and upgrade firmware* through USB dongle for router replacement.

It supports dual-image firmware* to choose which one to start.

Cloud/Host based InstaView/InstaAir** software for router/fleet management and monitoring**

Lantech InstaView** can offer fixed location router central management, configuration, and monitoring via secured Cloud or Host server. InstaAir** can offer fleet router management including signal strength, remote configure/upgrade, monitoring/alerting and report function

Optional USB to micro SD for storage backup or multimedia resources**

The optional internal USB to micro SD** can have data backup or pre-store the multimedia resources for content application. User can designate the route via load-balancing** scheme to upload/download the data per request.

Editable login page of captive portal

The IWAP-3002 supports editable captive portal function that allows administrator to force end-users redirect to authentication page.

Ruggedized industrial design and FCC*, CE* & E-marking certificate**

The IWAP-3002 is designed to meet with outdoor network

environment with IP 30 housing. It passed serious tests under extensive Industrial EMI and environmental vibration and shocks standards. With CE & FCC radio certification for Wi-Fi and E-marking** certificate. The IWAP-3002 is best for outdoor community, vehicle, process control automation etc.

For more usage flexibilities, IWAP-3002 supports wide operating temperature from -20°C to 70°C or -40°C to 70°C(-E)

FEATURES & BENEFITS

- **High Speed Air Connectivity:** WLAN interface support up to 2.6GMbps link speed(2AC) or 1.3GMbps (1AC)
- **Built-in two Gigabit ports incl. 1 PD port and 1LAN+1WAN or 2LAN**
- **Optional TWCC** (Train Wireless Carriage Coupling)** for auto wireless coupling
- **Dual band 2.4G and 5GHz with 802.11ac/a/b/g/n**
- **Support 2.4Ghz operating within the following frequency bands:**
 - **2.412~2.472 GHz**
- **Support 5Ghz operating within the following frequency bands:**
 - **5.180~5.825 GHz**
- **MIMO smart antenna technology with 3T3R with 6 SMA type connectors and optional antennas**
- **Air-teaming protection(2AC)**
 - **High-sustainability:** if one link member is down or severely interfered, the other link will keep the network traffic alive.
 - **Aggregated bandwidth:** The bandwidth of two link members can be aggregated to provide maximum throughput.
- **Fast roaming** (Optional) <50ms between APs by Wireless Controller**
- **IEEE 802.11h DFS and automatic TPC**
- **Unlimited concurrent WI-FI users**
- **Output power : <24dBm**
- **Transmit power adjustment**
- **VAP (virtual access point) support up to 16 SSIDs**
- **Operation modes : AP / Bridge / Client**
- **Traffic control for each SSID****
- **Band preference for same SSID services on dual band****
- **Rate selection to disable low data rate access****
- **Highly Security Capability: WEP64/128bits/ WPA/ WPA-PSK (TKIP*,AES)/ WPA2/ WPA2-PSK (TKIP*,AES)**
- **HTTP/HTTPS/Telnet/SSH & Administration access**
- **Support IPv6** & IPv4 protocol**
- **Radius Authentication, EAP-MD5, EAP-TLS, EAP-TTLS, PEAP; SSID broadcast disable supported****
- **Multiple channel bandwidths of 20MHz and 40MHz for 2.4G.**
- **Multiple channel bandwidths of 20MHz, 40MHz and 80MHz for 5G only.**
- **Wi-Fi Multimedia (WMM) and 802.11e traffic prioritization**

- **Support Multi-Site VPN for mesh tunneling as well as Open VPN, L2TP, IPsec and PPTP** fro secured network connection**
- **The built-in Layer-4 firewall includes DoS**, IP address filter / Mac address filter* / TCP/UDP port number**
- **Support SNMP*v1/v2c/v3**
- **NAT/DMZ**
- **Load Balancing** supports 8 mechanism between multiple WANs**


Pack	Algorithm	Description
Standard	Fixed	Manually route by traffic type through fixed WAN link.
Basic Package	Failover	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link fail occurs. Once failover will not fallback until link loss.
	Priority	Routes connections through preferred WAN link as primary while others follow by. Ex. Wi-Fi client>LTE>others
	Weighted Round-Robin	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights.
	Custom Route	Routing through the selected WAN for each specific traffic, ex: TCP/UDP port number and IP address.
Full Package (incl. basic package)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
	Fastest*	Routes connections through the WAN link with lowest latency time.

- **Built-in 2 or 4 x serial ports(RS232/RS422/485)**
- **Serial port with 2.5KV isolation on RS422/485**


- Supports optional 2DI / 2DO(Digital Input / Output)
- Built-in Modbus gateway converting Modbus RTU/ASCII to Modbus/TCP
- Optional DNP3 over Ethernet gateway on serial ports
- Event alerting by Syslog, SNMP Trap, Email**, Relay ; Permanent local log rotation / Maxi 1K records
- Remote Web control to get status or re-boot by Web
- Built-in RTC to keep track of time always
- Support SNTP to synchronize system clock
- Support LLDP discovery protocol
- Support DHCP Server and Client
- Reset button for factory default mode
- Graphic WI-FI signal strength & TX/RX rate display
- Firmware upgradeable through TFTP/FTP/HTTP
- Configuration backup and restoration
- Supports text configuration file for system quick installation
- USB port to upload/download firmware by USB dongle
- InstaView/AIR** for centralized configuration deployment, backup & upgrade
- Support editable captive portal login page
- Cloud/Host based InstaView/AIR** for fixed/fleet router management/configuration/monitoring
- IP 30 housing for industrial environment
- DIN-Rail and Wall-mount** installation
- Operation temperature -20~70C or -40°C to 70°C(-E)
- Wide range input voltage from 9V-60V

DIMENSIONS (unit=mm)

2AC-4S model

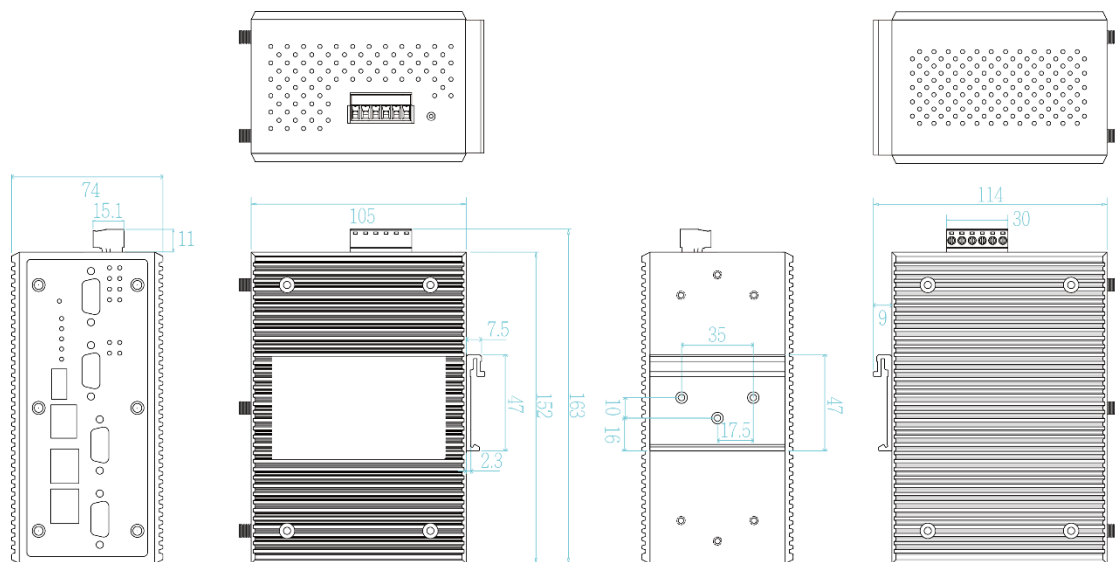

2AC-2S model

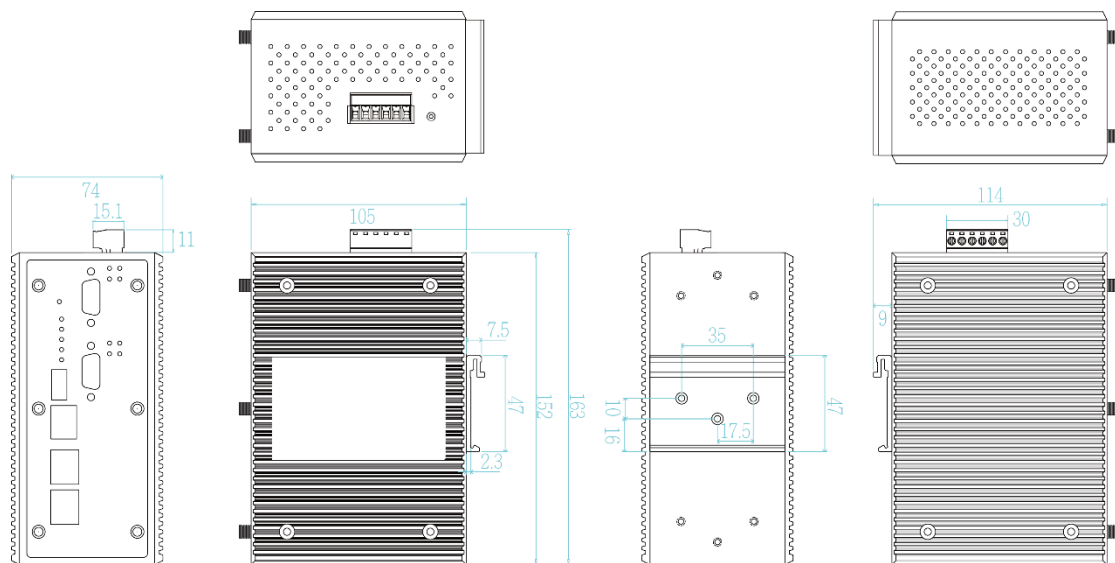

SPECIFICATION

WLAN Interface		Management	DDNS*
Operating Mode	AP/BRIDGE/Client modes	Load Balancing**	SNMP*v1,v2c,v3/ Web/Telnet/CLI
Radio Frequency Type	DSSS, OFDM	Fixed	8 schemes for multiple WAN
Wireless Standard	IEEE 802.11ac/n/a 5GHz IEEE 802.11b/g/n 2.4GHz	Basic Package**	
Wireless bandwidth	5GHz: Up to 1300Mbps 2.4GHz: Up to 450Mbps	Failover	Manually route by traffic type through fixed WAN link.
Modulation	802.11b: DSSS 802.11a/g: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11n: OFDM (BPSK, QPSK, 16-QAM, 64-QAM) 802.11ac: OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)	Priority	Routes connections through preferred WAN link while others stand-by. Sequentially activate another link if preferred link failure occurs.
Operating Frequency	IEEE 802.11 a/b/g/n ISM Band, 2.412GHz~2.472GHz, 5150MHz~5850MHz	Weighted Round-Robin	Routes connections through preferred WAN link while others stand-by. Sequentially activate other links if overflow occurs.
Transmission Rate	IEEE802.11ac: up to 1300Mbps IEEE802.11b: 1 / 2 / 5.5 / 11 Mbps IEEE802.11a/g: 6 / 9 / 12 / 18 / 24 / 36 / 48 / 54 Mbps IEEE802.11n: up to 450Mbps	Custom Route	Evenly distribute the traffic over all working WAN links in circular order according to the specified weights
IEEE 802.11b/g/n(2.4Gbps)	Output Power Tx +/- 2dB(per chain) 18dBm @ 1~11Mbps 18dBm @ 6~54Mbps 20/20dBm @ MCS0-MCS7 (HT20/40) Receiver Sensitivity Rx +/- 2dB ≤ -95dBm @ 1~11Mbps ≤ -92dBm @ 6~18Mbps ≤ -88dBm @ 24Mbps ≤ -85dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -94dBm @ MCS0 (HT20/40) ≤ -76dBm @ MCS7 (HT20/40)	Full Package incl. basic package**	
IEEE 802.11a/n/ac(5Gbps)	Output Power Tx +/- 2dB(per chain) 20dBm @ 6~24Mbps 16dBm @ 36~54Mbps 19/18dBm @ MCS0 (HT20/40) 16/16dBm @ MCS7 (HT20/40) 19/18/18dBm @ MCS0 (VHT20/40/80) 13/13/13dBm @ MCS8 (VHT20/40/80) 13/13dBm @ MCS9 (VHT40/80) Receiver Sensitivity Rx +/- 2dB ≤ -92dBm @ 6~18Mbps ≤ -86dBm @ 24Mbps ≤ -84dBm @ 36Mbps ≤ -81dBm @ 48Mbps ≤ -80dBm @ 54Mbps ≤ -93dBm @ MCS0 (HT20/40) ≤ -71dBm/≤ -80dBm @ MCS7 (HT20/40) ≤ -90dBm @ MCS0 (VHT20/40/80) ≤ -69dBm @ MCS8 (VHT20/40/80) ≤ -66dBm @ MCS9 (VHT40/80)	Sticky Session*	Binding all connections in an application session to particular WAN link to ensure all connections in the session are routed to the same WAN link , that is suitable for security services like online payment etc.
Encryption Security	WEP : (64-bit ,128-bit key supported) WPA /WPA2 : IEEE802.11i(WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) OKC** and 802.11r** EAP,MD5,EAP-TLS,EAP-TLS,EAP MsCHAPv3 and PEAP **	Smallest Load*	Routes connections through the WAN link with highest free bandwidth ratio. The ratio = 1 - (traffic load / the capability of a WAN link). The traffic load could be defined by downstream, upstream or total traffic
Wireless Security	SSID broadcast disable**	Fastest*	Routes connections through the WAN link with lowest latency time.
Software		Fast Roaming<50ms**	802.11r <50ms work with Lantech controller
IP v6/4	Present	Air-teaming protection(2AC)**	● High sustainability with fail over link ● Aggregated bandwidth
Login Security	Supports IEEE802.1x** Authentication/RADIUS	WMM	Wi-Fi multimedia and 802.11e traffic prioritization
TWCC**	Optional Train Wireless Carriage Coupling for Auto wireless Coupling	Security	WEP64/128bits/ WPA/ WPA-PSK (TKIP*,AES)/ WPA2/ WPA2-PSK (TKIP*,AES)/SSH/SSL/HTTPS
Access Security	HTTP/HTTPS/Telnet/SSH & Administration; SNMP*v1/v2/v3 access for authentication via MD5/SHA(v3) and Encryption via DES/AES(v3)	Authentication	Radius Authentication, EAP-MD5, EAP-TLS, EAP-TLS, PEAP; SSID broadcast disable supported**
Protocol	PPPoE Client,DHCP server/client, Adjustable MTU, Port forwarding (NAPT), DMZ; NAT, SNTP, Firewall(Firewall(DoS**); IP address filter / Mac address filter* / TCP/UDP port name),VRRP**,	SSID	16 sets
		Client mode	PMK** Caching and pre-authentication.
		Timer	Built-in Real Time Clock to keep track of time always(RTC)
		Discovery	IEEE 802.1ab Link Layer Discovery Protocol (LLDP)
		SNMP trap	Device cold / warm start Port link up / link down DI / DO high / low**
		Graphic signal display	GraphicWi-Fi signal strength & TX / RX rate display
		Remote Web control	To reboot or get status of router by WebUI
		Captive portal	Editable captive portal login page
		Maintenance	Firmware upgradeable through TFTP/FTP/HTTP
		Configuration backup & restore	Supports text configuration file for quick system installation USB port to upload/download firmware by USB dongle InstaView/AIR** for mass configuration/upgrade
		Physical Ports & System	
		Connectors	10/100/1000T: 2x ports RJ 45 with Auto MDI/MDI-X function USB x 1 RS-232 connector: 1 x RJ 45 Serial connector : 2 or 4 DB9 SMA connector : 6 male Power & P-Fail connector: 1 x 6-pole terminal block DIDO **: 1 x 5-pole terminal block
		Serial Baud Rate	1000Kbps high data rate, 250kbps normal for RS232 ; 20Mbps high data rate, 250kbps normal for RS422/485
		Serial Data Bits	5, 6, 7, 8
		Serial Parity	odd, even, none, mark, space
		Serial Stop Bits	1, 1.5, 2
		RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
		RS-422	Tx+, Tx-, Rx+, Rx-, GND
		RS-485 (2-wire)	Data+, Data, GND

Micro SD	128G or 256G(MSD model)	Power consumption (Typ.)	20 Watts
Isolation protection	RS422/485 2.5KV isolation; 8KV contact & 15KV air RS232 8KV contact and 15KV air ESD DIDO** 3KV isolation Input power 1.5KVA isolation	Physical Characteristic	
LED Indicators		Enclosure	IP 30 aluminum case
Power & System indicator	Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red) , Ring Master(Green), Storage(Green), Serial1/Serial2/Serial3/Serial4(Green)	Dimension	74 (W) x 114 (D) x 152 (H) mm
10/100/1000Base-T (X) port indicator	Link/Activity (Green), Speed (Yellow)	Weight	900g
WLAN LEDs	WLAN 1 ,WLAN2 Link /ACT : Green	Environmental	
DIDO**	2 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 2 Digital Output(DO): Open collector to 40 VDC, 200mA	Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Fault	Red: Ethernet link down or power down	Operating Temperature	-20°C ~ 70°C (-4°F ~ 158°F) -40°C ~ 70°C (-40°F ~ 158°F)-E model
Fault contact		Operating Humidity	5% to 95% Non-condensing
Relay	Relay output to carry capacity of 1A at 24VDC	Regulatory approvals	
Power		EMC	FCC* Part 15 Class A, EN55032*
Input power	Dual DC inputs, 9V~60VDC	EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
		E-marking**	E13**
		MTBF	NA
		Warranty	5 years

*Future Release

**Optional

RF Performance Table

	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance	RX Specifications Sensitivity	Tolerance
2.4GHz 802.11b	1Mbps	20dBm	25dBm	±2dB	-95dBm	±2dB
	2Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	5.5Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
	11Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB
2.4GHz 802.11g	6Mbps	21dBm	26dBm	±2dB	-94dBm	±2dB
	9Mbps	21dBm	26dBm	±2dB	-93dBm	±2dB
	12Mbps	21dBm	26dBm	±2dB	-93dBm	±2dB
	18Mbps	21dBm	26dBm	±2dB	-90dBm	±2dB
	24Mbps	21dBm	26dBm	±2dB	-90dBm	±2dB
	36Mbps	20dBm	25dBm	±2dB	-85dBm	±2dB
	48Mbps	19dBm	24dBm	±2dB	-82dBm	±2dB
	54Mbps	18dBm	23dBm	±2dB	-80dBm	±2dB
2.4GHz 802.11n HT20	MCS 0	21dBm	26dBm	±2dB	-94dBm	±2dB
	MCS 1	21dBm	26dBm	±2dB	-92dBm	±2dB
	MCS 2	21dBm	26dBm	±2dB	-89dBm	±2dB
	MCS 3	20dBm	25dBm	±2dB	-84dBm	±2dB
	MCS 4	20dBm	25dBm	±2dB	-83dBm	±2dB
	MCS 5	20dBm	25dBm	±2dB	-80dBm	±2dB
	MCS 6	18dBm	23dBm	±2dB	-79dBm	±2dB
	MCS 7	16dBm	21dBm	±2dB	-77dBm	±2dB
2.4GHz 802.11n HT40	MCS 0	20dBm	25dBm	±2dB	-93dBm	±2dB
	MCS 1	20dBm	25dBm	±2dB	-91dBm	±2dB
	MCS 2	20dBm	25dBm	±2dB	-89dBm	±2dB
	MCS 3	19dBm	24dBm	±2dB	-84dBm	±2dB
	MCS 4	19dBm	24dBm	±2dB	-82dBm	±2dB
	MCS 5	19dBm	24dBm	±2dB	-80dBm	±2dB
	MCS 6	18dBm	23dBm	±2dB	-79dBm	±2dB
	MCS 7	16dBm	21dBm	±2dB	-75dBm	±2dB

	Data Rate	TX Power (per chain)	TX Power (3 chains)	Tolerance	RX Specifications Sensitivity	Tolerance
5GHz 802.11a	6Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	9Mbps	20dBm	25dBm	±2dB	-94dBm	±2dB
	12Mbps	20dBm	25dBm	±2dB	-92dBm	±2dB
	18Mbps	20dBm	25dBm	±2dB	-91dBm	±2dB
	24Mbps	20dBm	25dBm	±2dB	-90dBm	±2dB
	36Mbps	18dBm	23dBm	±2dB	-86dBm	±2dB
	48Mbps	16dBm	21dBm	±2dB	-83dBm	±2dB

	54Mbps	15dBm	20dBm	±2dB	-80dBm	±2dB
5GHz 802.11n/ac VHT20	MCS 0	19dBm	24dBm	±2dB	-93dBm	±2dB
	MCS 1	19dBm	24dBm	±2dB	-90dBm	±2dB
	MCS 2	19dBm	24dBm	±2dB	-87dBm	±2dB
	MCS 3	18dBm	23dBm	±2dB	-83dBm	±2dB
	MCS 4	18dBm	23dBm	±2dB	-80dBm	±2dB
	MCS 5	17dBm	22dBm	±2dB	-77dBm	±2dB
	MCS 6	16dBm	21dBm	±2dB	-74dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-73dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-71dBm	±2dB
5GHz 802.11ac VHT40	MCS 0	18dBm	23dBm	±2dB	-90dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-88dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-82dBm	±2dB
	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
	MCS 5	16dBm	21dBm	±2dB	-75dBm	±2dB
	MCS 6	15dBm	20dBm	±2dB	-73dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-73dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB
	MCS 9	13dBm	18dBm	±2dB	-68dBm	±2dB
5GHz 802.11ac VHT80	MCS 0	18dBm	23dBm	±2dB	-89dBm	±2dB
	MCS 1	18dBm	23dBm	±2dB	-87dBm	±2dB
	MCS 2	18dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	17dBm	22dBm	±2dB	-83dBm	±2dB
	MCS 4	17dBm	22dBm	±2dB	-80dBm	±2dB
	MCS 5	16dBm	21dBm	±2dB	-78dBm	±2dB
	MCS 6	15dBm	20dBm	±2dB	-75dBm	±2dB
	MCS 7	14dBm	19dBm	±2dB	-72dBm	±2dB
	MCS 8	13dBm	18dBm	±2dB	-70dBm	±2dB
	MCS 9	13dBm	18dBm	±2dB	-68dBm	±2dB

ORDERING INFORMATION

For -40~70C operational temperature model, the model name will add -E

- **IWAP-3002-1AC-2S.....P/N: 8612-101**
One Wi-Fi 11ac/a/b/g/n Load Balancing** AP VPN Mobile Router w/ 2 RS232 serial ports and 2 port Gigabit Ethernet (incl.1 PD port); dual 9V~60VDC; -20~70C
- **IWAP-3002-1AC-2SA.....P/N: 8612-102**
One Wi-Fi 11ac/a/b/g/n Load Balancing** AP VPN Mobile Router w/ 2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet (incl.1 PD port); dual 9V~60VDC; -20~70C
- **IWAP-3002-2AC-2S.....P/N: 8612-103**
Two Wi-Fi 11ac/a/b/g/n Load Balancing** AP VPN Mobile Router w/2 RS232 serial ports and 2 port Gigabit Ethernet (incl.1 PD port); dual 9V~60VDC -20~70C
- **IWAP-3002-2AC-2SA.....P/N:8612-104**
Two Wi-Fi 11ac/a/b/g/n Load Balancing** AP VPN Mobile Router w/2 RS422/485 serial isolated ports and 2 port Gigabit Ethernet (incl.1 PD port); dual 9V~60VDC; -20~70C
- **IWAP-3002-1AC-4S.....P/N: 8612-105**
One Wi-Fi 11ac/a/b/g/n Load Balancing** AP VPN Mobile Router w/ 4 RS232 serial ports and 2 port Gigabit Ethernet (incl.1 PD port); dual 9V~60VDC; -20~70C
- **IWAP-3002-1AC-4SA.....P/N: 8612-106**
One Wi-Fi 11ac/a/b/g/n Load Balancing** AP VPN Mobile Router w/ 4 RS422/485 serial isolated ports and 2 port Gigabit Ethernet (incl.1 PD port); dual 9V~60VDC; -20~70C
- **IWAP-3002-2AC-4S.....P/N: 8612-107**
Two Wi-Fi 11ac/a/b/g/n Load Balancing** AP VPN Mobile Router w/4 RS232 serial ports and 2 port Gigabit Ethernet (incl.1 PD port); dual 9V~60VDC; -20~70C
- **IWAP-3002-2AC-4SA.....P/N: 8612-108**
Two Wi-Fi 11ac/a/b/g/n Load Balancing** AP VPN Mobile Router w/4 RS422/485 serial isolated ports and 2 port Gigabit Ethernet (incl.1 PD port); dual 9V~60VDC; -20~70C

Built-in MSD for Router 3000 Series

- **Built-in USB to Micro SD 128GB Module.....P/N:8850-210**
- **Built-in USB to Micro SD 256GB Module.....P/N:8850-213**

Software License

- **LOAD BALANCING Basic Package**.....P/N: 9000-101
- **LOAD BALANCING Full Package**.....P/N: 9000-102
- **TWCC**.....P/N: 9000-103
- **DNP3 GATEWAY**.....P/N: 9000-106
- **WIRELESS ROAMING**.....P/N: 9000-107

OPTIONAL ACCESSORIES

Wireless Connector Adapter

- **ADA11000052** RP SMA Jack Base, Length : 1M

Wireless Antenna

- **ANT11000051** 2.4G&5.8GHz SMA Omni-directional / dipole antenna, 2dBi or 5.8GHz 3dBi

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2018 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at any time, without notice.