
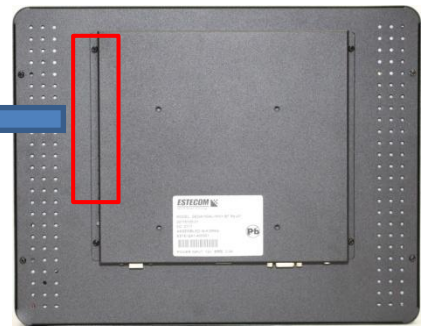


# GEOA150AU-MI01-BT

## Estecom 15.0" Touch Open Frame Display

This open frame display employs the latest LCD technology to ensure high reliability and the best user experience

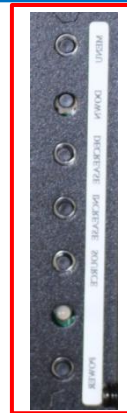

### 15.0" Touch Open Frame Display

Designed for demanding environments, the Estecom 15.0" Enclosed Open Frame Monitor series delivers a long life cycle and high performance of touch experience to a wide range of commercial and industrial applications.

The Estecom Open Frame family series will lead you to dynamic digital world with instrument **"drop-in"** designs.

### Features

- Estecom Controller Board : MARIGOLD-I
- 1024 x 768 (16.2M / RGB 8-bits)
- 4:3 Aspect Ratio
- 700 : 1 Contrast Ratio
- 250cd/m<sup>2</sup> (typ.) Brightness
- 85/85/80/80 (L/R/U/D)
- Durable Touch Screen : **Shadow Sensor**
  - Option : IR / SAW / 4 & 5 wire Resistive / P-CAP
  - Window 8 Plug & Play Touch Controller, USB(Cable included)
- Robust CNC milled enclosure by ventilation structure
- Other value-added options
- Compliant with safety regulations

### Application

- Small Info-desk Kiosk
- Gaming & Amusement
- Industrial Automation
- ATM / POS
- Medical Cart & Station
- CCTV Monitor
- Vehicle Monitor

### Accessories (Option)



DVI



VGA



RS232



USB



Power Adaptor



Power Cord  
(110V / 220V)

# GEOA150AU-MI01-BT

## Controller Board

Model : MARIGOLD-I




## Features

- Resolution support : up to WUXGA @ 60Hz/1080i
- Input : VGA, HDMI, DP
- PIP with High Picture Quality
- VESA DDC 1/2B compliant
- 7 buttons OSD Board (SGML0000700)  
Menu / Down / UP / Decrease(Left) / Increase(Right) / Source/Power
- Customization available by request

## also compatible with others...

- IRIS, IVY, ORCHI-D/I MARIGOLD-D, POPPY-O/S II, A-3188S

## Dimensions | Mechanical Specifications | Cables

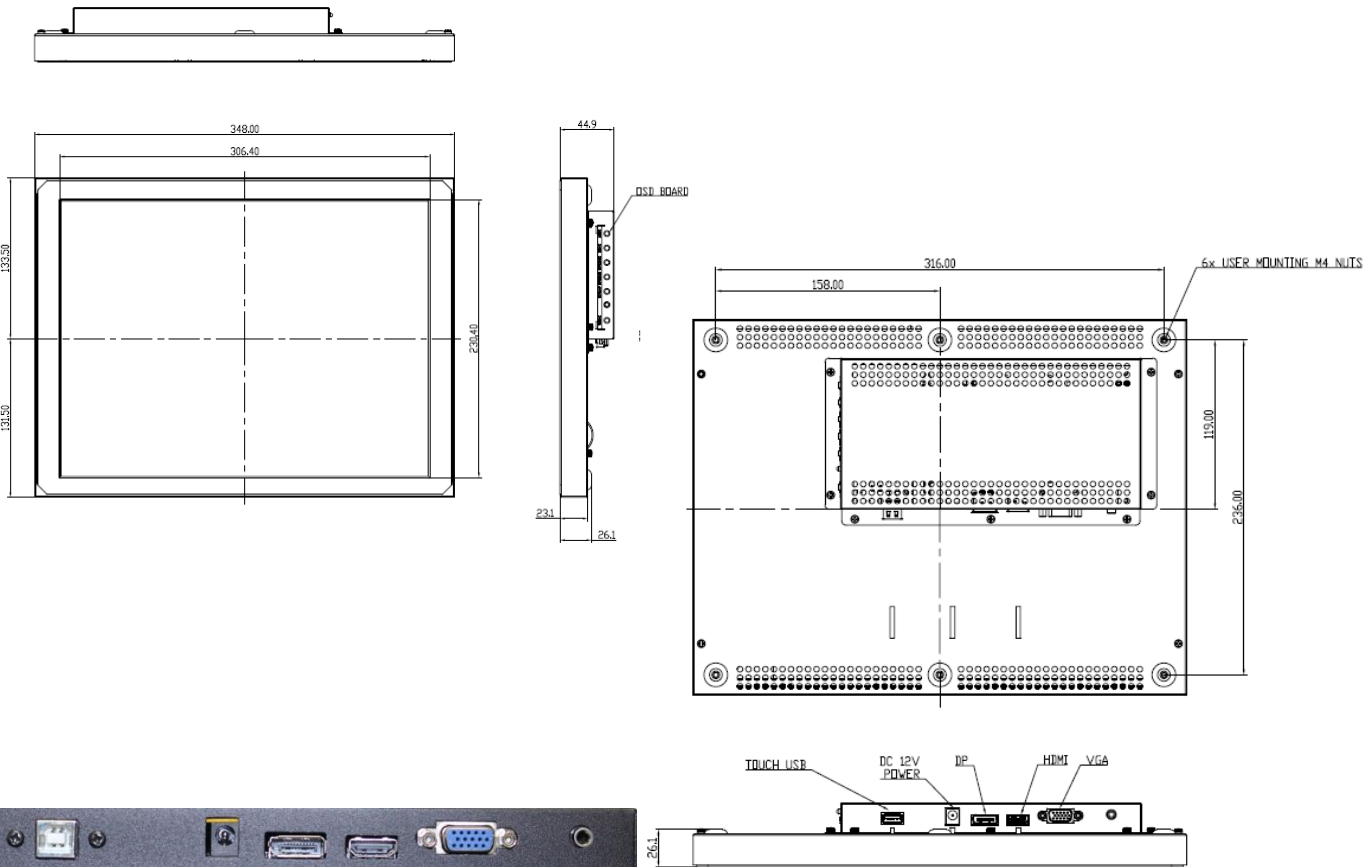

ESTECOM Open Frame series