


Estecom 42.0" Open Frame

This High-Brightness open frame display employs the latest LCD technology to ensure high reliability and the best user experience

42.0" Open Frame Display

Designed for demanding environments, the Estecom 42.0" Open Frame series delivers a long life cycle and high performance of touch experience to a wide range of commercial and industrial applications.

The Estecom Open Frame family series will lead you to dynamic digital world with instrument **"drop-in"** designs.



Features

- Estecom Controller Board : MARIGOLD-I
- 1920 x 1080 (10 bit(8bit+FRC) / 1073.1 mil.)
- 16:9 Aspect Ratio
- 4000 : 1 Contrast Ratio
- 500cd/m² (typ.) Brightness
- 89/89/89/89 (L/R/U/D)
- Robust CNC milled enclosure by ventilation structure
- Other value-added options
- Compliant with safety regulations
- Touch Screen : P-CAP
 - Touch Type : Shadow Sense / IR / SAW / 4 or 5 wire Resistive
 - Window 10 Plug & Play Touch Controller, USB

Application

- Information Kiosk
- Gaming & Amusement
- Indoor/Outdoor Digital Signage
- Commercial Advertising DID
- Touch Table

Accessories (Option)



DVI



VGA



RS232



USB



Power Adaptor



Power Cord
(110V / 220V)

GEOA420AU-MI01-GT

Controller Board

Model : MARIGOLD-I




Features

- Resolution support : up to WUXGA @ 60Hz/1080i
- Input : VGA, HDMI, DP
- PIP with High Picture Quality
- VESA DDC 1/2B compliant
- 7 buttons OSD Board (SGML0000700)
Menu / Down / UP / Decrease(Left) / Increase(Right) / Source/Power
- Customization available by request

also compatible with others...

- IRIS, ORCHID-D/I MARIGOLD-D, POPPY-O/S II, SAFFRON, CROCUS (A-3188S, IVY)
- ** **"A-3188S" & "IVY"** Board can be used together with all Estecom controller boards for additional features. For more detail specification, please contact sales@estecom.co.kr

Dimensions | Mechanical Specifications

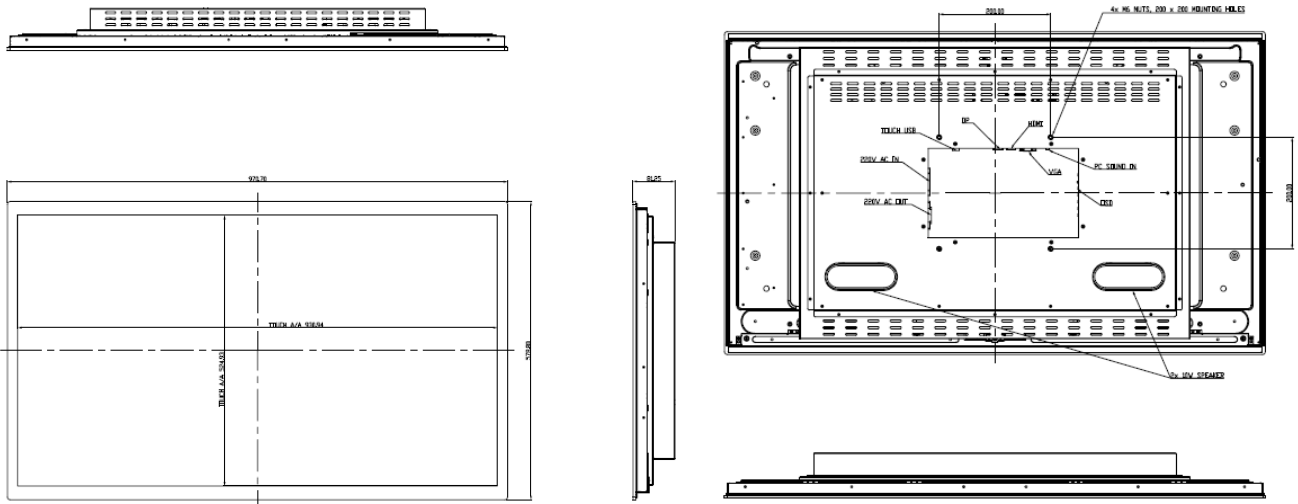

ESTECOM Open Frame series