



RAIL STRETCHED DISPLAY SOLUTION

FEATURES



C101 DISPLAY SOLUTION

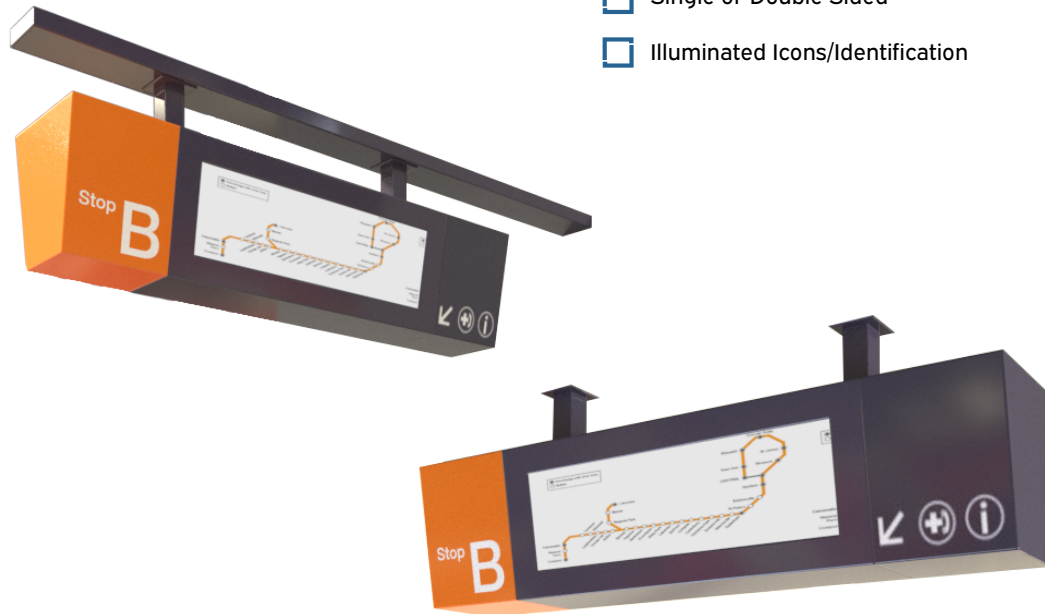

- LCD Screens
- Single or Double Sided
- Illuminated Icons/Identification

ENCLOSED MONITOR			
ALUMINIUM	STANDARD		
ENCLOSURE COLOUR BLACK	STANDARD		
OTHER COLOURS	OPTIONAL		
DIMENSIONS (mm)	401(H) x 1709(W) x 357(D)	401(H) x 1709(W) x 357(D)	401(H) x 1709(W) x 357(D)
WEIGHT SINGLE SIDE INCLUDING LCD AND PLAYER	65KG	65KG	65KG
FRONT GLASS ANTI-REFLECTIVE/LAMINATED 3H			
MOUNTING	STANDARD		

ENVIRONMENTAL	
TNI TEMPERATURE	WIDE TEMPERATURE -40-110c TNI PF FILM
OPERATING TEMPERATURE	0°C to +50°C
STORAGE TEMPERATURE	-20°C to +60°C
HUMIDITY	+10°C to +90°C
INGRESS PROTECTION	IP54 / IP65 OPTIONAL

OPTIONS	
OTHER INPUTS	ETHERNET WI-FI; USB; 3G/4G; AUDIO, BUILT IN COMPUTER
TOUCH SCREENS	N/A
SECURITY & PROTECTION OPTIONS	PASSWORD PROTECTED REMOTE CONTROL; CONDENSATION PROTECTION CIRCUITRY; OVER /UNDER TEMPERATURE PROTECTION; INTELLIGENT INTERNAL ENVIRONMENTAL CONTROL

OPTIONAL ACCESSORIES	
BIRD DETERRENTS - ROLLERS OR SPIKES	OPTIONAL
PROTECTION HOODS	OPTIONAL

SPECS


MODEL			
LCD PANEL SIZE	37"	42"	49"
RESOLUTION	1920 X 290	1920 X 480	1920 X 360
BRIGHTNESS	700 Nits		
CONTRAST RATIO	1200:1 (typ)	4000:1 (typ)	4000:1 (typ)
RESPONSE TIME	8ms (typ)		
VIEWING ANGLE	R/L 180° U/D 270°		
HALF LIGHT LIFE TIME	50,000 Hours		
ACTIVE AREA (mm)	904.32 (H) x 254.34 (W)	1039.68 (H) x 259.92(W)	1209.6 (H) x 226.8 (W)
POWER CONSUMPTION	<50Watts	<60Watts	<60Watts
LCD WEIGHT	4.6kgs	5.5kgs	6.4kgs

STANDARDS			
EN55002 - CE - IEC60950 - IEC 60529	STANDARD	STANDARD	STANDARD
AS/NZS 60950.1:2015	Y	Y	Y
AS 60529:2004	Y	Y	Y
AS/NZS 61000.6.2:2012	Y	Y	Y
AS/NZS 61000.6.3:2012	Y	Y	Y

BUILT IN COMPUTER	I/O INTERFACE-REAR	IVY SURVEILLANCE BOARD OPTION
QUAD CORE INTEL® ATOM™ X7-E3950 PROCESSOR, 2.0GHz	2 X ANTENNA HOLE FOR	HUMIDITY SENSOR
DDR3L 1600MHZ 8GB	WI-FI OR TV TUNER	TEMPERATURE SENSOR
128GB INDUSTRIAL SOLID STATE DRIVE -	3 X USB3.0	SHOCK SENSOR
EXTENDED TEMP +85OC	1 X AUDIO-OUT	MOTION SENSOR
I/O INTERFACE-FRONT	1 X MIC-IN	LIGHT SENSOR
1 X 19V DC IN	EXPANSION	LIGHT SENSOR
1 X DB9 FOR RS-232	1 X MINI-PCIE SLOT (FULL	BACKLIGHT FAILURE DETECTION
1 X RJ45 WITH LEDS 10/100/1000MBPS ETHERNET	SIZE) WIRELESS LAN + BT	FAN CONTROL
2 X USB3.0	1 X SIM SLOT	VOLTAGE CONTROL
1 X DISPLAY PORT	ENVIRONMENT	DOOR ALARM
1 X DISPLAY PORT	OPERATING TEMPERATURE:	FILTER ALARM
2 X HDMI PORT	-10°C TO 60°C (SSD)	
1 X HDD LED	CERTIFICATION	
1 X POWER SWITCH	CE APPROVAL	
	FCC CLASS A	


RAIL STRETCHED DISPLAY SOLUTION

FEATURES



C102 DISPLAY SOLUTION

- LCD Screens
- Single or Double Sided

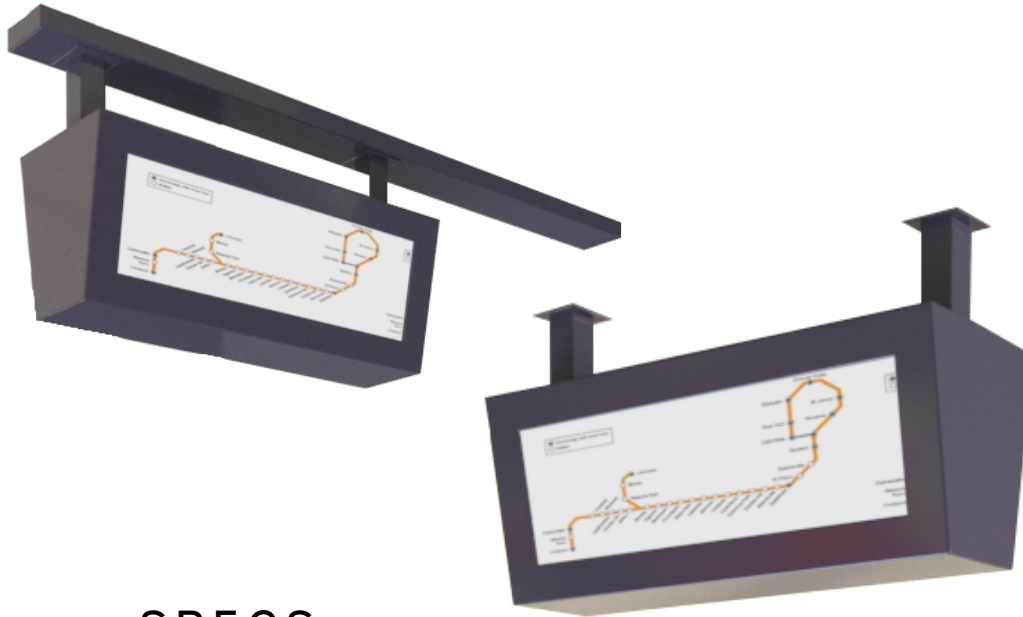

SPECS

MODEL			
LCD PANEL SIZE	37"	42"	49"
RESOLUTION	1920 X 290	1920 X 480	1920 X 360
BRIGHTNESS	1500 Nits		
CONTRAST RATIO	1200:1 (typ)	4000:1 (typ)	4000:1 (typ)
RESPONSE TIME	8ms (typ)		
VIEWING ANGLE	R/L 180° U/D 270°		
HALF LIGHT LIFE TIME	50,000 Hours		
ACTIVE AREA (mm)	904.32 (H) x 254.34 (W)	1039.68 (H) x 259.92(W)	1209.6 (H) x 226.8 (W)
POWER CONSUMPTION	<85Watts	<85Watts	<95Watts
LCD WEIGHT	4.6kgs	5.5kgs	6.4kgs

STANDARDS			
EN55002 - CE - IEC60950 - IEC 60529	STANDARD	STANDARD	STANDARD
AS/NZS 60950.1:2015	Y	Y	Y
AS 60529:2004	Y	Y	Y
AS/NZS 61000.6.2:2012	Y	Y	Y
AS/NZS 61000.6.3:2012	Y	Y	Y

ENCLOSED MONITOR			
ALUMINIUM	STANDARD		
ENCLOSURE COLOUR BLACK	STANDARD		
OTHER COLOURS	OPTIONAL		
DIMENSIONS (mm)	401(H) x 1066(W) x 357(D)	401(H) x 1066(W) x 357(D)	401(H) x 1066(W) x 357(D)
WEIGHT SINGLE SIDE INCLUDING LCD AND PLAYER	53KG	53KG	53KG
FRONT GLASS ANTI-REFLECTIVE/LAMINATED 3H			
MOUNTING	STANDARD		

ENVIRONMENTAL	
TNI TEMPERATURE	WIDE TEMPERATURE -40-110c TNI PF FILM
OPERATING TEMPERATURE	0°C to +50°C
STORAGE TEMPERATURE	-20°C to +60°C
HUMIDITY	+10°C to +90°C
INGRESS PROTECTION	IP54 / IP65 OPTIONAL

OPTIONS	
OTHER INPUTS	ETHERNET WI-FI; USB; 3G/4G; AUDIO, BUILT IN COMPUTER
TOUCH SCREENS	N/A
SECURITY & PROTECTION OPTIONS	PASSWORD PROTECTED REMOTE CONTROL; CONDENSATION PROTECTION CIRCUITRY; OVER /UNDER TEMPERATURE PROTECTION; INTELLIGENT INTERNAL ENVIRONMENTAL CONTROL

OPTIONAL ACCESSORIES	
BIRD DETERRENTS - ROLLERS OR SPIKES	OPTIONAL
PROTECTION HOODS	OPTIONAL

BUILT IN COMPUTER	I/O INTERFACE-REAR	IVY SURVEILLANCE BOARD OPTION
QUAD CORE INTEL® ATOM™ X7-E3950 PROCESSOR, 2.0GHz	2 X ANTENNA HOLE FOR	HUMIDITY SENSOR
DDR3L 1600MHZ 8GB	WI-FI OR TV TUNER	TEMPERATURE SENSOR
128GB INDUSTRIAL SOLID STATE DRIVE -	3 X USB3.0	SHOCK SENSOR
EXTENDED TEMP +85OC	1 X AUDIO-OUT	MOTION SENSOR
I/O INTERFACE-FRONT	1 X MIC-IN	LIGHT SENSOR
1 X 19V DC IN	EXPANSION	LIGHT SENSOR
1 X DB9 FOR RS-232	1 X MINI-PCIE SLOT (FULL	BACKLIGHT FAILURE DETECTION
1 X RJ45 WITH LEDS 10/100/1000MBPS ETHERNET	SIZE) WIRELESS LAN + BT	FAN CONTROL
2 X USB3.0	1 X SIM SLOT	VOLTAGE CONTROL
1 X DISPLAY PORT	ENVIRONMENT	DOOR ALARM
1 X DISPLAY PORT	OPERATING TEMPERATURE:	FILTER ALARM
2 X HDMI PORT	-10°C TO 60°C (SSD)	
1 X HDD LED	CERTIFICATION	
1 X POWER SWITCH	CE APPROVAL	
	FCC CLASS A	