


DSP501-A NEW

Digital Signage Player with Intel® Celeron® Processor 4305UE, DisplayPort++, HDMI, 5 USB, 2 LAN, Hailo-8 SoC

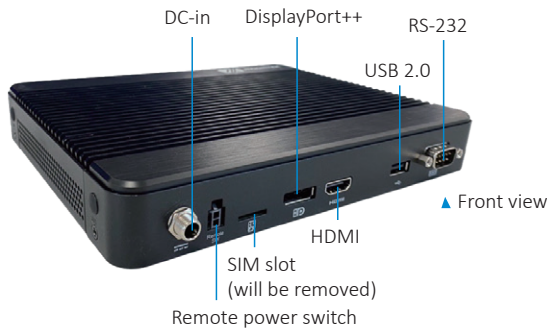

Features

- Intel® Celeron® processor 4305UE
- 2 DDR4-2400 SO-DIMM for up to 32GB of memory
- 1 DisplayPort++ and 1 HDMI 2.0
- 5 USB, 1 GbE LAN, 2.5GbE LAN
- 1 M.2 Key E 2230 for Wi-Fi/Bluetooth



Specifications

CPU	Intel® Celeron® processor 4305UE
System Memory	2 x DDR4-2400 SO-DIMM, up to 32GB
Chipset	N/A
Storage	1 x M.2 Key M 2280 (SATA & NVMe)
System I/O Outlet	4 x USB 3.0 1 x USB 2.0 1 x GbE LAN 1 x 2.5 GbE LAN 1 x HDMI 2.0 1 x DisplayPort++ 1 x RS-232 1 x Mic-in 1 x Line-out 1 x DC power input (lockable) 1 x HDD LED 1 x Power button 1 x Reset switch 1 x Remote power switch 4 x Antenna opening
Expansion Interface	1 x M.2 Key E 2230 slot for Wi-Fi/Bluetooth
Battery Lithium	Lithium 3 V/220 mAH
Power Input	+12V DC-in
Dimensions	200 mm (7.8") (W) x 160 mm (6.2") (D) x 29 mm (1.14") (H)
Weight (net/gross)	1.3 kg (2.86 lb)/2.3 kg (5.07 lb)
Operating Temperature	0°C to +50°C (+32°F to +122°F) disabling CPU Turbo boost
Operation Humidity	10% - 90% relative humidity, non-condensing

Ordering Information

Standard

DSP501-A (P/N:TBD)	Digital Signage Player with Intel® Celeron® processor 4305UE, DisplayPort++, HDMI, 5 USB, 2 LAN, Hailo-8 SoC
-----------------------	--

Optional

DDR4 SO-DIMM	4GB to 32GB
Wireless LAN Kit	Wi-Fi module and antenna
Storage	M.2 Key M 2280 (SATA & NVMe)

Packing List

- 1 x Quick installation guide
- 1 x Adapter 12V 60W
- 1 x Wall mount kit
- 4 x Foot pad

Dimensions

