


EMPS-3401

mPCIe to four SATA III Module




SATAIII 7pin MALE

Features

- mPCIe to four SATA III ports.
- Supports AHCI, Port-Multiplier.
- Supports Native Command Queuing
- Supports error reporting, recovery and correction.
- 30 μ golden finger, 3 years warranty.
- Industrial design, manufactured in innodisk Taiwan

Mechanical Drawing

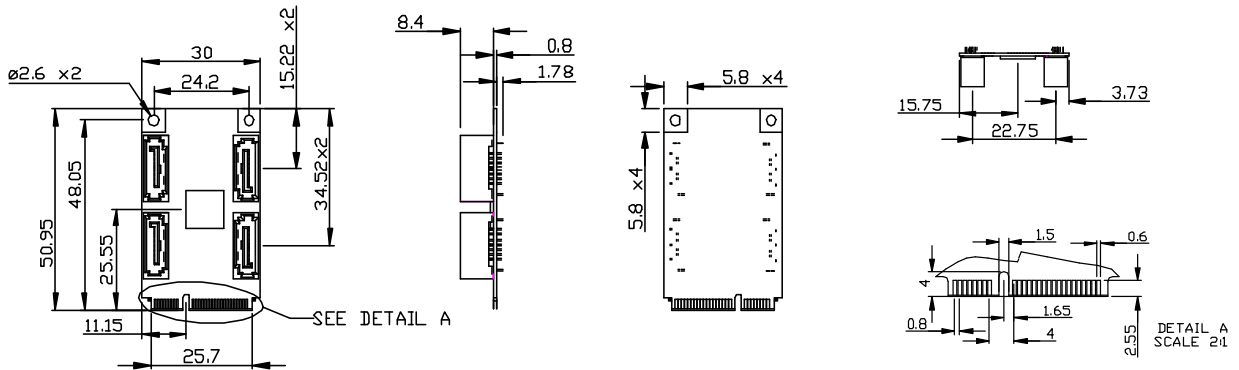

Specifications

Headquarters (Taiwan)

9F., No.100, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City, Taiwan (R.O.C.)
Tel: +886-2-26963000
Email: sales@innodisk.com

Branch Offices:

USA

usasales@innodisk.com
+1-510-770-9421

Europe

eusales@innodisk.com
+31-040-282-1818

Japan

jpsales@innodisk.com
+81-45-594-7581

China

sales_cn@innodisk.com
+86-755-21673689

www.innodisk.com

© 2014 Innodisk Corporation.
All right reserved. Specifications are subject to change without prior notice.

April 30, 2014

| | |
|-------------------|---|
| Form-Factor | mPCIe |
| Input I/F | PCI Express 2.0 |
| Output I/F | SATA III |
| Output Connector | SATA 7pin x 4 |
| Bridge | Marvell 88SE9215 |
| Max TDP | 2.74W (3.3V x 830mA) |
| Dimension (WxLxH) | 30 x 50.9 x 10.9 mm, Weight: 8.5g |
| Temperature | Operation: STD: 0°C ~ +70°C Storage: -55°C ~ +95°C |
| Environment | Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms |
| Notes | |

Order information

EMPS-3401-C1
mPCIe to four SATA III Module