

IES-0208T (IP67/IP43)

8 10/100TX + 2 Giga T IP67/IP43 rated Industrial Switch

- EN50155/ E-mark certified
- Provides M12 connector with IP67 or 43 rated protection
- Wide Operating Temperature from -40°C to 75°C
- Wide range dual power inputs 9.5~56VDC
- 110V single power input 43~160V for 110V model



IP67 Rated



IP43 Rated

OVERVIEW

Lantech IES-0208T (IP67/IP43) is an 8 10/100 Base-TX+2GigaT with M12-connector unmanaged industrial switch for IP67 or IP43 rated protection, which meets the high reliability requirements demanded by industrial rolling stock applications.

The IES-0208T (IP67/IP43) is designed to meet with critical network environment with IP67/43 enclosure and M12 connectors for protection against dust and water. IP67 model can be immersed 1 meter under water for 30 minutes long, so it is the best to place in the highly damp and moisture area in the train, vehicle or rail-side. Both have passed harsh environmental testing to comply with Industrial EMI and Safety

standards as well as stability testing such as Free fall, Shock, and Vibration. For a greater flexibility in application the IES-0208T (IP67/IP43) supports an extended operating temperature range from -40°C to 75°C.

The wide range dual power input from 9.5V~56V fits with most of train/vehicle usage. The 110V model offers dual power supply that can be powered from 43V to 160VDC.


With EN45545-2 Fire & Smoke, E-mark, and EN50155 certification, the IES-0208T (IP67/IP43) is best for railway and vehicle applications.

FEATURES & BENEFITS


- 8 10/100TX+2GigaT Unmanaged Industrial Switch with M12 connectors and IP67/43 rated protection
- Dual Power Design with wide DC9.5V~56V input
- 110V model support dual 43~160VDC power
- Back-plane (Switching Fabric): 3.6 Gbps
- 8K MAC address table
- Wide Operating Temperature (-40°C ~75°C)
- Din rail** and wall mount design
- EN45545-2 Fire & Smoke, E-mark, EN50155 and EN61373 shock/vibration certified

DIMENSIONS (unit=mm)

IP67 model

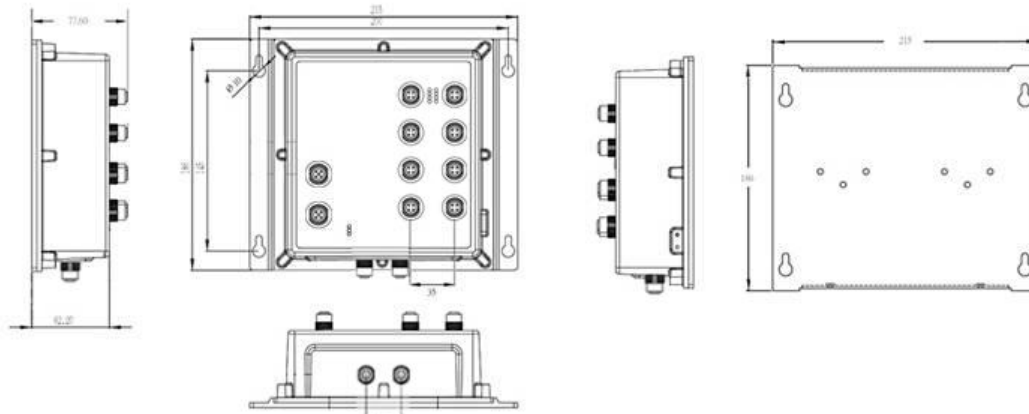

IP43 model

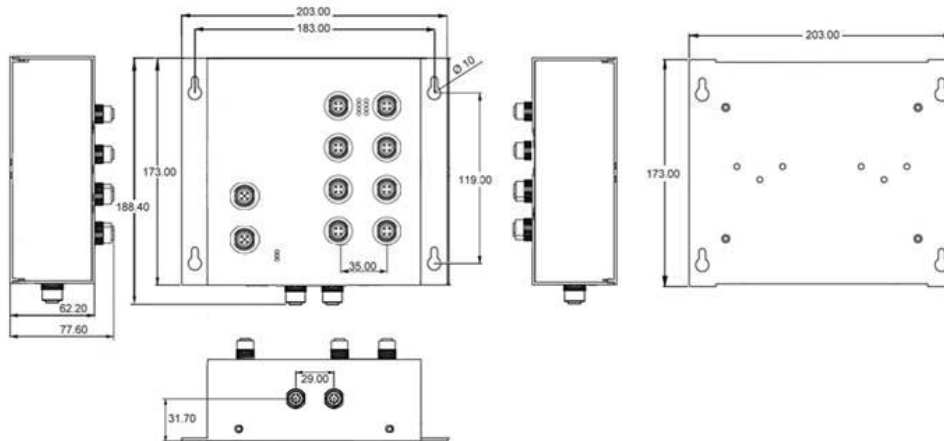

SPECIFICATIONS

Hardware Specification		Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
IEEE Standard	IEEE802.3 10BASE-T Ethernet IEEE802.3u 100BASE-T Ethernet IEEE802.3ab 1000BASE-T Ethernet IEEE802.3x Flow Control and Back Pressure	Case Dimension	Aluminum case, IP-67, 215mm(W)x185mm(H)x71mm(D) Aluminum case, IP-43 202mm(W)x172mm(H)x62.5mm(D)
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Fiber Ethernet port	Weight	1.4kgs (IP67); 1.2kgs(IP43)
Mac Address	8K MAC address table	Installation	Din Rail**, Wall Mount Design
Connector	10/100T: 8 x M12, 4-pole D-coded, Female with auto MDI/MDI-X function 10/100/1000T : 2 x M12 M12 8-pole A-coded with autoMDI/MDI-X function Power connector: 1 x M12, 5-pole A-coded, Male	EMC	FCC Class A, CE EN61000-4-2 (ESD), CE EN61000-4-3 (RS), CE EN-61000-4-4 (EFT), CE EN61000-4-5 (Surge), CE EN61000-4-6 (CS), CE EN61000-4-8 (Magnetic Field), CE EN61000-6-2, CE EN61000-6-4
Protocol	CSMA/CD	Stability Testing	IEC61373 (Shock), EN61373 (Shock and Vibration)
LED	Per unit: Power 1 (Green), Power 2 (Green), Ethernet: Link/Activity (Green) GigaT: Link/Activity (Green)	Certificates & report	EN50155/EN50121-3-2/EN50121-4 Certificate EN45545-2 R24/R25 (EN ISO 4589-2, EN ISO 5659-2, NF X70-100-1 & 2) Fire & Smoke Certificate E-Mark E4 Certificate
Power Supply	9.5~60DC on standard model 43~160VDC on 110V model with input isolation	Warranty	5 years
Power Consumption	10W at 12/24/48V input 13.5W at 110V input		
Operating Humidity	5% to 95% (Non-condensing)		
Operating Temperature	-40°C ~ 75°C (-40°F ~ 167°F)		

*Pending
**Optional

ORDERING INFORMATION

All model packages include M12 caps and wall mount bracket. All standard models are non-coating, optional coating models are available with -C model name.

- **IES-0208T-67.....P/N: 8360-542**
8 10/100TX+2 GigaT IP67 rated Industrial Switch w/M12 connectors; dual 9.5~56V input; -40~75C
- **IES-0208T-43.....P/N: 8360-5421**
8 10/100TX+2Giga T IP43 rated Industrial Switch w/M12 connectors; dual 9.5~56V input; -40~75C
- **IES-0208T-67-110V.....P/N: 8360-543**
8 10/100TX+2GigaT IP67 rated Industrial Switch w/M12 connectors; dual 43~160VDC input; -40~75C
- **IES-0208T-43-110V.....P/N: 8360-5431**
8 10/100TX+2GigaT IP43 rated Industrial Switch w/M12 connectors; dual 43~160VDC input; -40~75C

OPTIONAL ACCESSORIES

M12/M23 Connector & Cable

- **ECON120005PF** 5 Pin M12 Power Female Connector
- **ECONM12-5P(F)70CM CABLE** 5 Pin M12 Power Female 90C angle Connector+ 70 CM Cable
- **ECAB124030MJS** 4 Pin M12 RJ45 Male 3 Meters; STP Cable

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2014 Copyright Lantech Communications Global Inc. all rights reserved.
 The revise authority rights of product specifications belong to Lantech Communications Global Inc.
 Lantech may make changes to specification and product descriptions at anytime, without notice.