



PM-2004/PM-2008 *PCI-104 4-port RS-232/422/485 Module*



PM-2004



PM-2008



4 x DB9 connector



Flat Cable



Features

1. PCI-104 form factor with RoHS complaint
2. 16C950 UART Controller
3. 4-port (PM-2004) / 8-port (PM-2008) RS-232/422/485
4. Support Shared IRQ
5. PCI bus Specifications 2.1 compliant
6. Isolated protection
7. 128-byte deep FIFO per transmitter and receiver

Packing List

1 x 4/8-Port RS-232/422/485 Module	2 x Flat Cable (P/N: 32200-076000) for PM-2008
1 x COM port cable with 4xDB9 connector (P/N: 32000-088800) for PM-2004	1 x Mini Jumper Pack
1 x Flat Cable (P/N: 32200-076000) for PM-2004	1 x Utility CD
2 x COM port cable with 4xDB9 connector (P/N: 32000-088800) for PM-2008	1 x QIG


Specifications

- ◆ Bus Interface: PCI-104
- ◆ Number of Ports: 4-port (PM-2004) / 8-port (PM-2008)
- ◆ Data Bits: 5,6,7,8
- ◆ Stop Bits: 1, 1.5, 2
- ◆ Parity: None, Even, Odd
- ◆ Speed (bps): 50 ~ 921.6 K
- ◆ Connectors: 4 / 8 DB9 male
- ◆ ESD protect (Human Body Mode) ±15KV
- ◆ Isolated Protection 1000Vdc
- ◆ Power consumption: 5V @450mA
- ◆ Temperature operation: -5~65°C (23~149°F)
- ◆ Humidity operation: 5% ~95 non-condensing
- ◆ Dimensions: 96 mm x 90 mm

Ordering Information

Part No.	Description
PM-2004-R10	PCI-104, 4-port RS-232/422/485 Module
PM-2008-R10	PCI-104, 8-port RS-232/422/485 Module

PM-1004 *PC/104 4-port RS-232/422/485 Module*




P/N: 32200-026800-RS

Ship with 4-port RS-232/422/485 connection cable

Specifications

1. PC/104 form factor with RoHS complaint
2. 16C554 UART Controller
3. 4 x RS-232/422/485
4. Supports shared IRQ or independent IRQ mode
5. Jumper selectable interrupt level
6. MAX. baud rate: 921.6kb/s
7. Support O.S: Windows NT/2000/NT/XP, Linux and Windows CE

Dimensions

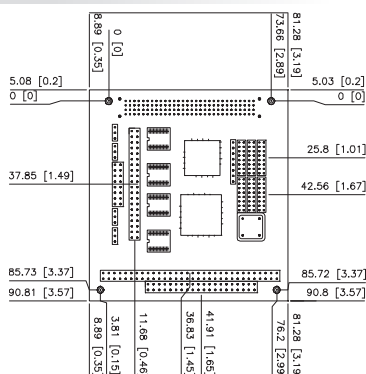


Packing List

1 x PM-1004 PCI/104 4-port RS-232/422/485 Module
1 x 4-port RS-232/422/485 connection cable (P/N: 32200-026800-RS)
1 x RS-232 cable (P/N: 32200-025400-RS)
1 x Utility CD

Ordering Information

Part No.	Description
PM-1004-R20	PC/104 4-Port RS-232/422/485 Module

PM-1028 *PC/104 4/8 port RS-232 Module*




P/N: 32200-025400-RS

Ship with 4-port RS-232 connection cable

Specifications

1. PC/104 form factor with RoHS complaint
2. 16C554 UART Controller
3. Supports shared IRQ or independent IRQ mode
4. Jumper selectable interrupt level
5. COM port base I/O addressing setting
6. MAX. baud rate: 921.6kb/s
7. Interrupt vector addressing setting
8. Support O.S: Windows NT/2000/NT/XP, Linux and Windows CE

Dimensions

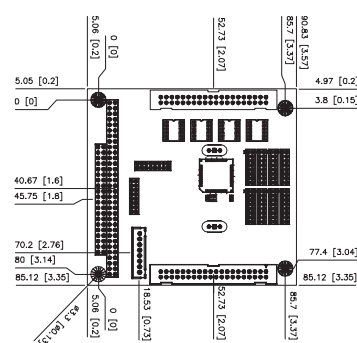

Packing List

1 x PM-1028 PC/104 4/8-Port RS-232 Module	1 x Mini jumper pack
1 x 4-port RS-232 connection cable for PM-1028-4-R20 (P/N: 32200-025400-RS)	1 x Utility CD
2 x 4-port RS-232 connection cables for PM-1028-8-R20 (P/N: 32200-025400-RS)	

Ordering Information

Part No.	Description
PM-1028-4-R20	PC/104, 4-port RS-232 PC/104 Module
PM-1028-8-R20	PC/104, 8-port RS-232 PC/104 Module