

IES-5416DFT (IP67/IP43)

16 10/100TX + 2 10/100/1000T + 2 100/1000FX Dual Speed Fiber L2⁺

Industrial Managed Switch w/ enhanced G.8032 Ring

- EN50155/61373/45545-2 certified; Optional 72V / 110V input voltage
- Enhanced G.8032 ring protection < 20ms with easy configuration; Train ring for dynamic coupling ring; Aggregation ring*
- Support PTPv2 < 1us, relay contact & environmental monitoring
- Miss-wiring avoidance; Repowered auto ring restore (node failure protection); Optional bypass protection
- IP67/ IP43 housing; User friendly UI, including auto topology drawing; Complete CLI
- Support LACP link aggregation, IGMP v3/router port, DHCP server & DHCP Option82 for Port&VLAN based DHCP distribution, Mac based DHCP server, QoS by VLAN, SSH/SSL, TACAS+*, HTTPS, ACL, IPv6, SMS
- N-key configurator** for upgrading, auto/editable configuration back up and restoration without computer



IP67 model



IP43 model



OVERVIEW

Lantech IES-5416DFT (IP67/IP43) is a high performance L2+ (Gigabit uplink) switch with 16 10/100TX + 2 10/100/1000T + 2 Dual Speed Fiber by M12 provides L2 wire speed and advanced security function for network aggregation deployment. It delivers ITU G.8032 enhanced ring recovery less than 20ms including train coupling ring, enhanced mode for easy configuration and aggregation ring*, comprehensive QoS, QoS by VLAN, advanced security including ACL L2/L3, SSH/SSL, Mac based DHCP server, DHCP Option 82, DHCP server, IGMPv1/v2/v3/router port, QinQ* (double tag VLAN) which are important features required in train and large network. It also supports Cisco Discovery Protocol (CDP) and LLDP for Ciscoworks to detect the switch info and show on L2 map topology.

Lantech IES-5416DFT (IP67/IP43) features hardware-based PTP IEEE1588 v2 function which can allow 2 10/100/1000T and 2 100/1000M Fiber uplinks to synchronize the network with precise accuracy (under 1us).

The Lantech IES-5416DFT (IP67/IP43) is designed with dual power supply at 9.5~56VDC. Optional 72V model can accept 50.4V~90VDC dual input range for high speed train environment. Optional 110V model builds in dual power with input voltage ranging from 43V~160V. Featured with relay contact alarm function, the IES-5416DFT (IP67/IP43) is able to connect with alarm system in case of power failure or port disconnection events. The IES-5416DFT (IP67/IP43) also provides ±2000V EFT and ±6000V ESD protection, which can

reduce unstable situation caused by power line and Ethernet.

The IES-5416DFT (IP67/IP43) also embedded several features for stronger and reliable network protection in an easy and intuitive way. When the pre-set ring configuration failed or looped by miss-wiring, Lantech IES-5416DFT (IP67/IP43) is able to alert with the LED indicator and send out an email, traps or a SMS text. Repowered auto ring restore function (node failure protection) ensures the switches in a ring to survive after power breakout is back. The status can be shown in NMS when each switch is back. This feature prevents the broken ring and keep ring alive without any re-configuration needed. Loop protection is also available to prevent the generation of broadcast storm when a dumb switch is inserted in a closed loop connection. The optional hardware bypass function provides redundant fiber connection when power or switch fails in a ring or bus structure.

DHCP option 82 and relay agent function (port&vlan based DHCP distribution) can offer the same IP address on port base or vlan base where there is need to replace the new device connecting to Lantech switches to avoid any network disruption. The built-in DHCP Option 82 server offers the convenience of police setting on the switch. Mac based DHCP server function assigns an IP address according to its MAC address to include dumb switches in DHCP network.

Lantech InstaConfig software** provides easy configuration for mass deployment. The configuration file can also be exported in

text file so that it can be edited and configured back to switch with ease for mass deployment. The built-in watchdog design can automatically reboot the switch when cpu is found dead.

The user friendly UI, innovative auto topology drawing and topology demo makes IES-5416DFT (IP67/IP43) much easier to get hands-on. The switch also equips the RTC (real time clock) which can keep track of time always. The complete CLI enables professional engineer to configure setting by command line.

Lantech IES-5416DFT (IP67/IP43) features enhanced G.8032 ring which can be self-healed in less than 20ms for ring/chain topologies which covers dynamic coupling ring & aggregation ring* protection. The innovative auto-Ring configurator (auto mode) can calculate owner and neighbor in one step. The enhanced mode and train mode ring configuration have never been easier. It supports MSTP that allows RSTP over Vlan for redundant links. The train ring is specially designed for auto coupling topology that is required in train car interchange application. The ITU G.8032 Ring and RSTP can be co-existed in the same switch with different ports for the most flexible protection.

The configuration file of Lantech IES-5416DFT (IP67/IP43) can be exported in text file so that it can be edited and configured back to switch with ease for mass deployment. The optional N-key configurator offers firmware upgrade, auto/editable configuration back up and restoration without computer by adjusting the DIP switch.

QoS by VLAN can allow switch to tag QoS by VLAN regardless the devices acknowledge QoS or not in which greatly enhance the bandwidth management in a network.

In case of event alarm, the IES-5416DFT (IP67/IP43) will

immediately send an email & SMS text message to pre-defined addresses as well as SNMP Traps out. It provides 1DI and 1DO while disconnection of the specific port was detected; DO will activate the signal LED to alarm. DI can integrate the sensors for events and DO will trigger the alarm while sending alert information to IP network with email and traps.

The built-in environmental monitoring can detect switch overall temperature, voltage and current where can send the SNMP traps, email and SMS alert when abnormal.

Lantech IES-5416DFT (IP67/IP43) features high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in factory, substation, steel automation, aviation, mining and process control. It is the best solution for Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory and assembly lines.

The IES-5416DFT (IP67/IP43) is designed to meet with critical network environment with IP67/IP43 aluminum enclosure and M12 connectors for water proof. It passed serious tests under extensive Industrial EMI and Safety standards. With EN45545-2 Fire & Smoke, E-mark*, and EN50155 certification, the IES-5416DFT (IP67/IP43) is best for railway in train/track side, vehicle and mining applications. For more usage flexibilities, IES-5416DFT (IP67/IP43) supports wide operating temperature from -40°C to 75°C.

The optional bypass relay is set to bypass the switch to the next one in 4ms when power is off in order to protect the network from crashing. Lantech bypass caters to remain in bypass mode until the switch is completely booting up when power is back to avoid another network lost. The bypass is also activated when detecting the CPU watchdog is ON.

FEATURES & BENEFITS


- **16 10/100TX + 2 10/100/1000T + 2 Dual Speed Fiber Industrial Managed IP67/IP43 M12 Switch (Total 20 Ports Switch)**
- **EN45545-2 Fire & Smoke, EN50155 and EN61373 shock/vibration certified**
- **IEEE 1588 PTP v2 (under 1μ s) at 4 Giga ports**
- **N-key** configurator for firmware upgrade, auto/editable configuration back up and restoration**
- **Back-plane (Switching Fabric): 11.2Gbps**
- **16K MAC address table**
- **9KB Jumbo frame supported on all ports**
- **User friendly UI, auto topology drawing, topology demo, complete CLI for professional setting**
- **Enhanced G.8032 Ring protection in 20ms < 256 switches**
 - Support various ring/chain topologies, including train dynamic coupling ring& aggregation ring*
 - Enhanced G.8032 ring configuration with ease
 - Auto ring configuration(auto mode) for single ring
 - Co-exist with RSTP on different ports
 - Train ring for auto coupling topology
- **Aggregation ring for ring redundancy and bandwidth combination***
- **Provides EFT protection ±2000 VDC for power line.**
- **Supports ±6000 VDC Ethernet ESD protection**
- **LACP load balancing to distribute the load***
- **Built-in RTC (Real Time Clock) to keep track of time**
- **Supports IEEE 802.1p Class of Service, per port provides 8 priority queues Port base, Tag Base and Type of Service Priority**
- **IEEE 802.1d STP, IEEE 802.1w RSTP,802.1s MSTP VLAN redundancy**
- **4K 802.1Q VLAN, Port based VLAN, GVRP**, QinQ***
- **Supports IEEE 802.1ab LLDP, Cisco CDP; LLDP info can be viewed via Web/ Console/ Lantech™ InstaConfig**/ Lantech™ InstaView****
- **DHCP server / client / DHCP Option 82 relay / DHCP Option 82 server for Port&Vlan based DHCP distribution**
- **Mac based DHCP server to assign IP address that includes dumb switches in DHCP network**
- **Bandwidth Control**
 - Ingress packet filter and egress rate limit
 - Broadcast/multicast packet filter control
- **Relay alarm output system events**
- **Miss-wiring avoidance**
 - LED indicator
 - Email, traps, or SMS notification
- **Repowered auto ring restore**
 - Ensure the switches in a ring to survive after power breakout is back
 - The status can be shown in NMS when each

switch is back


- TFTP/HTTP firmware upgrade; Lantech™ InstaConfig** for multiple upgrade
- System Event Log, SMTP Email alert, SMS mobile (text) and SNMP Trap for alarm support; 32 RMON counters
- Security
 - SSL/SSH/ACL L2&L3
 - Port Security: MAC address entries/Filter/MAC-Port binding
 - IP Security: IP address security management to prevent unauthorized intruder.
 - Management access control with priority
 - Login Security: IEEE802.1X/RADIUS
 - HTTPS for secure access to the web interface
- Static multicast forwarding forward reversed IGMP flow (MVR) with multicast packets binding with ports for IP surveillance application
- Multicast static route for non-IGMP camera to prevent flooding; IGMP router port to assign query in ring and for reversed multicast video flow
- Multicast VLAN registration for metro video*
- IGMPv1,v2,v3 with Query mode for multimedia; GMRP**
- Watchdog design to auto reboot switch CPU is found dead
- Built-in environmental monitoring for system input voltage, current, ambient temperature
- Supports DIDO (Digital Input/Digital Output)
- IP67/IP43 aluminum housing with DIN rail** and wall mount design
- Bypass protection** - Bypass failed switch caused by power failure of switch to protect network intactness

DIMENSIONS (unit=mm)

IP67 model

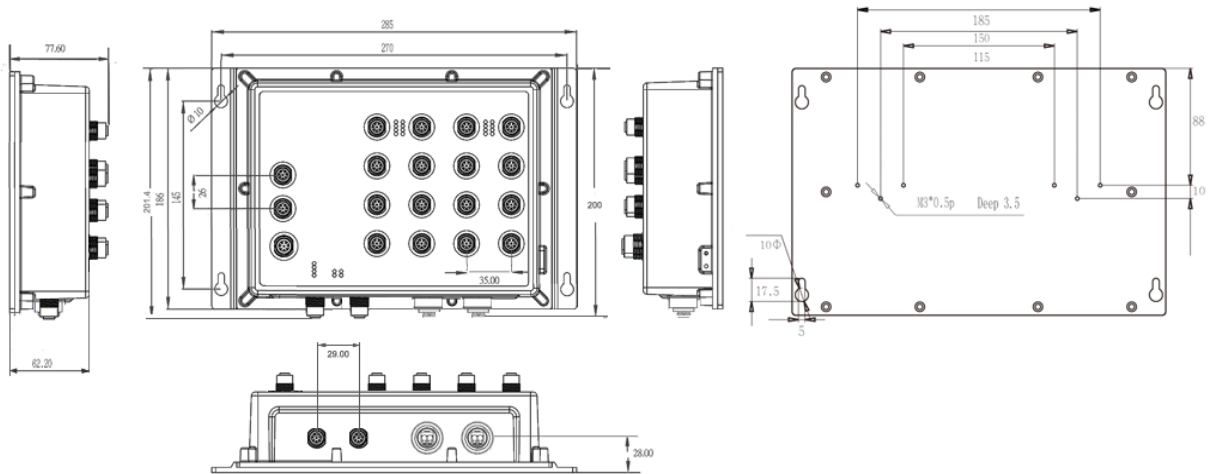

IP43 model

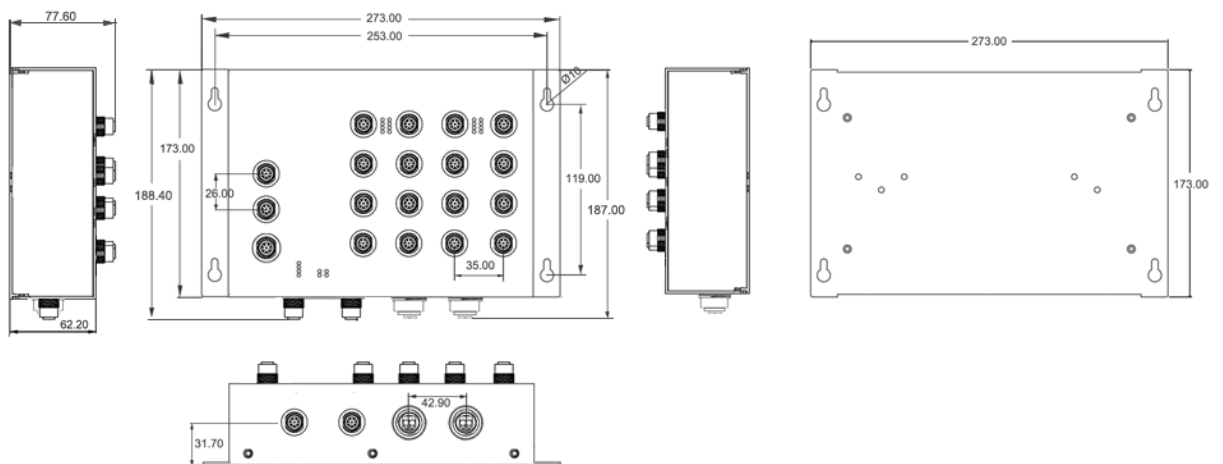

SPECIFICATION

Hardware Specification

Standards	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX IEEE802.3z Gigabit fiber IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1s Multiple Spanning Tree IEEE 802.3ad Link Aggregation Control Protocol (LACP) IEEE 802.1AB Link Layer Discovery Protocol (LLDP) IEEE 802.1X User Authentication (Radius) IEEE802.1p Class of Service IEEE802.1Q VLAN Tag
Switch Architecture	Back-plane (Switching Fabric): 11.2Gbps Packet throughput ability (Full-Duplex): 23.8Mpps @64bytes
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Fiber Ethernet port
CPU	Marvell 800Mhz
RAM	256M Byte
Flash	128M Byte
Mac Address	16K MAC address table
Jumbo frame	9KB on all ports
Connectors	10/100TX: 16 x ports M12 4-pole D-coded with Auto MDI/MDI-X function 10/100/1000T: 2 x ports M12 8-pole A-coded with Auto MDI/MDI-X function 100/1000 Dual Speed Fiber: 2 x LC connector for single-mode or multi-mode type fiber cable RS-232 connector: 1 x M12 5-pole A-coded Power Input connector : 1 x M12 5-pole A-coded Relay contact : 1 x M12 5-pole A-coded
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)
Giga Optical Cable	Multi-mode: 50/125um-62.5/125um Single mode: 9/125um Available distance: 0.5km (Multi-mode)/10km (Single-mode) Wavelength: 850nm (Multi-mode)/850nm (Single-mode)
100M Optical Cable	Multi-mode: 50/125um-62.5/125um Single mode: 9/125um Available distance: 2km (Multi-mode)/10km (Single-mode) Wavelength: 850nm (Multi-mode)/850nm (Single-mode)
Bypass Protection**	High-speed optical switching (<4ms) Minimal insertion loss (Max 1.6dB as Bypass Mode)
Protocol	CSMA/CD
LED	Per unit: Power 1 (Green), Power 2 (Green), P-Fail (Red) Ethernet port: Link/Activity (Green), Speed (Green); Optical fiber: Link/Activity (Green)
DI/DO	1 Digital Input (DI) : Level 0: -30~2V / Level 1: 10~30V Max. input current:8mA 1 Digital Output(DO): Open collector to 40 VDC, 200mA
Operating Humidity	5% ~ 95% (Non-condensing)
Operating Temperature	-40°C~75°C / -40°F~167°F (72V model: -40°C~60°C / -40°F~140°F)
Storage Temperature	-40°C~85°C / -40°F~185°F
Power Supply	Standard model:9.5~56VDC dual input 72V model: 50.4~90VDC dual input 110V model : 43~160VDC dual input with input isolation
Power Consumption	Max. 13W 12V~48VDC input Max. 16W 72VDC/110VDC input
Case Dimension	IP67 model: Aluminum case 285mm(W)x200mm(H)x84.4mm(D)

	IP43 model: Aluminum case 273mm(W)x187mm(H)x84.4mm(D)
Weight	2.1kgs(IP67); 1.8kgs (IP43)
Installation	DIN Rail** and Wall Mount Design
EMI & EMS	FCC Class A, CE EN61000-6-2, CE EN61000-6-4, CE EN61000-4-2, CE EN61000-4-3, CE EN61000-4-4, CE EN61000-4-5, CE EN61000-4-6, CE N61000-4-8, EN61000-4-11
Stability Testing	IEC60068-2-32 (Free fall), EN61373 (Shock and Vibration)
MTBF	NA
Certifications& report	EN50155/EN50121-3-2/EN50121-4 Certificate EN45545-2 R24/R25 (EN ISO 4589-2, EN ISO 5659-2, NF X70-100-1 & 2) Fire & Smoke Certificate
Safety	EN 60950-1 (Standard model and 110V model)
Warranty	5 years

Software Specification

Management	SNMP v1 v2c, v3/ Web/Telnet/CLI
SNMP MIB	RFC 1215 Traps MIB, RFC 1213 MIBII RFC 1158 MIBII RFC 1157 SNMP MIB, RFC 1493 Bridge MIB, RFC 1573 IF MIB RFC 2674 VLAN MIB, Partial RFC 1643 EtherLike, Partial RFC 1757 RMON, RFC 2674 Q-Bridge MIB; Bridge MIB, RFC 2790 Host Resource MIB LLDP MIB* RSTP MIB* Private MIB
ITU G.8032	Support ITU G.8032 v2/2012 for Ring protection in less than 20ms for self-heal recovery (basic mode) Support various ring/chain topologies Includes train dynamic coupling ring & aggregation ring* Enhanced G.8032 ring configuration with ease Co-exist with RSTP on different ports Train mode for auto coupling ring configuration
PTP v2	Support hardware-based IEEE1588 PTPv2 in 1µs, End to End (2-step) and Peer to Peer (2-step) modes in Transparent Clock, with 2 10/100/1000T and 2 100/1000M
User friendly UI	<ul style="list-style-type: none"> ■ Auto topology drawing ■ Topology demo ■ Auto configuration for G.8032(auto mode) for single ring ■ Complete CLI for professional setting
Port Trunk with LACP	LACP Port Trunk: 8 Trunk groups/Maximum 16 trunk members Aggregation ring for ring redundancy and bandwidth combination*
LLDP	Supports LLDP to allow switch to advise its identification and capability on the LAN
CDP	Cisco Discovery Protocol for topology mapping
Environmental Monitoring	System status for input voltage, current and ambient temperature to be shown in GUI and sent alerting if any abnormal status
VLAN	Port Based VLAN IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096.) GVRP** (256 Groups)**, QinQ
IPv6/4	Present
Spanning Tree	Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree, IEEE802.1s Multiple Spanning Tree
Quality of Service	The quality of service determined by port, Tag and IPv4 Type of service, IPv4 Differentiated Services Code Points - DSCP
Class of Service	Support IEEE802.1p class of service, per port provides 8 priority queues
QoS by VLAN	Tagged QoS by VLAN for all devices in the network
IP Security	Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder.
Login Security	Supports IEEE802.1X Authentication/RADIUS

Port Mirror	Support 3 mirroring types: "RX, TX and Both packet"	Alarm Relay current carry ability: 1A @ DC24V
Network Security	Support 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder. 802.1X access control for port based and MAC based authentication/MAC-Port binding Management access control with priority 256 Policy based Access Control List SSL/ SSH for Management HTTPS for secure access to the web interface TACACS+ for Management Authentication*	<ul style="list-style-type: none"> ■ Miss-wiring avoidance ■ Repowered auto ring restore ■ Loop protection
IGMP	Support IGMP snooping v1,v2,v3; Supports IGMP static route; 256 multicast groups; IGMP router port ; IGMP query; GMRP**	SNMP Trap Up to 10 trap stations; trap types including: <ul style="list-style-type: none"> ● Device cold start ● Authorization failure ● Port link up/link down ● DI/DO open/close ● Typology change(ITU ring) ● PoE ping failure ● Power failure ● Environmental abnormal
MVR	Static multicast forwarding forward reversed IGMP flow (MVR) with multicast packets binding with ports for IP surveillance application	DHCP Provide DHCP Client/ DHCP Server/DHCP Option 82/ DHCP Option 82 server/ Port based&VLAN based DHCP distribution (DHCP relay agent)
Bandwidth Control	Support ingress packet filter and egress packet limit. The egress rate control supports all of packet type. Ingress filter packet type combination rules are Broadcast/Multicast/Flooded Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all types of packet. The packet filter rate can be set an accurate value through the pull-down menu for the ingress packet filter and the egress packet limit.	Mac based DHCP Server Assign IP address by Mac that can include dumb switch in DHCP network
RTC	Built-in Real Time Clock to keep track of time always	DNS Provide DNS client feature and support Primary and Secondary DNS server.
Flow Control	Supports Flow Control for Full-duplex and Back Pressure for Half-duplex	SNTP Supports SNTP to synchronize system clock in Internet
System Log	Supports System log record and remote system log server	Firmware Update Supports TFTP firmware update, TFTP backup and restore; HTTP firmware upgrade; Lantech™ InstaConfig** for multiple upgrade
SMTP/Text SMS	Supports SMTP Server and 8 e-mail accounts for receiving event alert; can send SMS text alert via mobile	N-Key Configurator** RJ45 dongle for firmware upgrade, auto / editable configuration backup/restoration
Relay Alarm	Provides one relay output for port breakdown, power fail and alarm.	Configuration upload and download Supports text configuration file for system quick installation
		IfAlias Each port allows an alphabetic string of 128-byte assigned as its own unique name via the SNMP or CLI interface

*Future release
**Optional

ORDERING INFORMATION

All model packages include M12 caps and wall mount bracket. All standard models are non-coating, optional coating models are available with -C model name.

- **IES-5416DFT-67-MM.....P/N: 8360-638**
16 10/100TX + 2 GigaT + 2 100M 2KM / Giga SX 0.5KM M12 IP67 Industrial SNMP Switch; -40°C to 75°C; dual 9.5~56VDC
- **IES-5416DFT-67-SM.....P/N: 8360-639**
16 10/100TX + 2 GigaT + 2 100M 10KM / Giga LX 10KM M12 IP67 Industrial SNMP Switch; -40°C to 75°C; dual 9.5~56VDC
- **IES-5416DFT-67-MM-BF.....P/N: 8360-640**
16 10/100TX + 2 GigaT + 2 100M 2KM / Giga SX 0.5KM M12 IP67 Industrial SNMP Switch; -40°C to 75°C; w/ 1 pair Fiber Bypass protection; dual 9.5~56VDC
- **IES-5416DFT-67-SM-BF.....P/N: 8360-641**
16 10/100TX + 2 GigaT + 2 100M 10KM / Giga LX 10KM M12 IP67 Industrial SNMP Switch; -40°C to 75°C; w/ 1 pair Fiber Bypass protection; dual 9.5~56VDC
- **IES-5416DFT-67-MM-BT.....P/N: 8361-640**
16 10/100TX + 2 GigaT + 2 100M 2KM / Giga SX 0.5KM M12 IP67 Industrial SNMP Switch; -40°C to 75°C; w/ 1 pair GigaT Bypass protection; dual 9.5~56VDC
- **IES-5416DFT-67-SM-BT.....P/N: 8361-641**
16 10/100TX + 2 GigaT + 2 100M 10KM / Giga LX 10KM M12 IP67 Industrial SNMP Switch; -40°C to 75°C; w/ 1 pair GigaT Bypass protection; dual 9.5~56VDC
- **IES-5416DFT-67-MM-72V.....P/N: 8360-666**
16 10/100TX + 2 GigaT + 2 100M 2KM / Giga SX 0.5KM M12 IP67 Industrial SNMP Switch; -40°C to 60°C; dual 50.4~90VDC
- **IES-5416DFT-67-SM-72V.....P/N: 8360-667**
16 10/100TX + 2 GigaT + 2 100M 10KM / Giga LX 10KM M12 IP67 Industrial SNMP Switch; -40°C to 60°C; dual 50.4~90VDC
- **IES-5416DFT-67-MM-72V-BF.....P/N: 8360-668**
16 10/100TX + 2 GigaT + 2 100M 2KM / Giga SX 0.5KM M12 IP67 Industrial SNMP Switch; -40°C to 60°C; w/ 1 pair Fiber Bypass protection; dual 50.4~90VDC
- **IES-5416DFT-67-SM-72V-BF.....P/N: 8360-669**
16 10/100TX + 2 GigaT + 2 100M 10KM / Giga LX 10KM M12 IP67 Industrial SNMP Switch; -40°C to 60°C; w/ 1 pair Fiber Bypass protection; dual 50.4~90VDC

- **IES-5416DFT-67-MM-72V-BT.....P/N: 8361-668**
16 10/100TX + 2 GigaT + 2 100M 2KM / Giga SX 0.5KM M12 IP67 Industrial SNMP Switch; -40°C to 60°C; w/ 1 pair GigaT Bypass protection; dual 50.4~90VDC
- **IES-5416DFT-67-SM-72V-BT.....P/N: 8361-669**
16 10/100TX + 2 GigaT + 2 100M 10KM / Giga LX 10KM M12 IP67 Industrial SNMP Switch; -40°C to 60°C; w/ 1 pair GigaT Bypass protection; dual 50.4~90VDC
- **IES-5416DFT-67-MM-110V.....P/N: 8360-745**
16 10/100TX + 2 GigaT + 2 100M 2KM / Giga SX 0.5KM M12 IP67 Industrial SNMP Switch; -40°C to 75°C; dual 43~160VDC
- **IES-5416DFT-67-SM-110V.....P/N: 8360-746**
16 10/100TX + 2 GigaT + 2 100M 10KM / Giga LX 10KM M12 IP67 Industrial SNMP Switch; -40°C to 75°C; dual 43~160VDC
- **IES-5416DFT-43-MM.....P/N: 8360-6381**
16 10/100TX + 2 GigaT + 2 100M 2KM / Giga SX 0.5KM M12 IP43 Industrial SNMP Switch; -40°C to 75°C; dual 9.5~56VDC
- **IES-5416DFT-43-SM.....P/N: 8360-6391**
16 10/100TX + 2 GigaT + 2 100M 10KM / Giga LX 10KM M12 IP43 Industrial SNMP Switch; -40°C to 75°C; dual 9.5~56VDC
- **IES-5416DFT-43-MM-BF.....P/N: 8360-6401**
16 10/100TX + 2 GigaT + 2 100M 2KM / Giga SX 0.5KM M12 IP43 Industrial SNMP Switch; -40°C to 75°C; w/ 1 pair Fiber Bypass protection; dual 9.5~56VDC
- **IES-5416DFT-43-SM-BF.....P/N: 8360-6411**
16 10/100TX + 2 GigaT + 2 100M 10KM / Giga LX 10KM M12 IP43 Industrial SNMP Switch; -40°C to 75°C; w/ 1 pair Fiber Bypass protection; dual 9.5~56VDC
- **IES-5416DFT-43-MM-BT.....P/N: 8361-6401**
16 10/100TX + 2 GigaT + 2 100M 2KM / Giga SX 0.5KM M12 IP43 Industrial SNMP Switch; -40°C to 75°C; w/ 1 pair GigaT Bypass protection; 9.5~56VDC
- **IES-5416DFT-43-SM-BT.....P/N: 8361-6411**
16 10/100TX + 2 GigaT + 2 100M 10KM / Giga LX 10KM M12 IP43 Industrial SNMP Switch; -40°C to 75°C; w/ 1 pair GigaT Bypass protection; dual 9.5~56VDC
- **IES-5416DFT-43-MM-72V.....P/N: 8360-6661**
16 10/100TX + 2 GigaT + 2 100M 2KM / Giga SX 0.5KM M12 IP43 Industrial SNMP Switch; -40°C to 60°C; dual 50.4~90VDC
- **IES-5416DFT-43-SM-72V.....P/N: 8360-6671**
16 10/100TX + 2 GigaT + 2 100M 10KM / Giga LX 10KM M12 IP43 Industrial SNMP Switch; -40°C to 60°C; dual 50.4~90VDC
- **IES-5416DFT-43-MM-72V-BF.....P/N: 8360-6681**
16 10/100TX + 2 GigaT + 2 100M 2KM / Giga SX 0.5KM M12 IP43 Industrial SNMP Switch; -40°C to 60°C; w/ 1 pair Fiber Bypass protection; dual 50.4~90VDC
- **IES-5416DFT-43-SM-72V-BF.....P/N: 8360-6691**
16 10/100TX + 2 GigaT + 2 100M 10KM / Giga LX 10KM M12 IP43 Industrial SNMP Switch; -40°C to 60°C; w/ 1 pair Fiber Bypass protection; dual 50.4~90VDC
- **IES-5416DFT-43-MM-72V-BT.....P/N: 8361-6681**
16 10/100TX + 2 GigaT + 2 100M 2KM / Giga SX 0.5KM M12 IP43 Industrial SNMP Switch; -40°C to 60°C; w/ 1 pair GigaT Bypass protection; dual 50.4~90VDC
- **IES-5416DFT-43-SM-72V-BT.....P/N: 8361-6691**
16 10/100TX + 2 GigaT + 2 100M 10KM / Giga LX 10KM M12 IP43 Industrial SNMP Switch; -40°C to 60°C; w/ 1 pair GigaT Bypass protection; dual 50.4~90VDC
- **IES-5416DFT-43-MM-110V.....P/N: 8360-7451**
16 10/100TX + 2 GigaT + 2 100M 2KM / Giga SX 0.5KM M12 IP43 Industrial SNMP Switch; -40°C to 75°C; dual 43~160VDC
- **IES-5416DFT-43-SM-110V.....P/N: 8360-7461**
16 10/100TX + 2 GigaT + 2 100M 10KM / Giga LX 10KM M12 IP43 Industrial SNMP Switch; -40°C to 75°C; dual 43~160VDC
- **N-key Configurator.....P/N:8850-100**
RJ45 connector dongle for firmware upgrade, auto/editable configuration backup and restoration; -20°C to 60°

OPTIONAL ACCESSORIES

M12/M23 Connector & Cable

- **ECON120005PF** 5 pin M12 power female connector
- **ECONM12-5P(F)70CM CABLE** 5 pin M12 power cable 90 degree angle, 70cm
- **ECAB124030MJS** 4 Pin M12 RJ45 Male 3 Meters; STP Cable

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2014 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.